



2000

*The Navy's
Test, Measurement,
and Diagnostic
Equipment Catalog*

For more information and additional copies contact:

Thomas P. Mullin

Phone: (717) 605-5760

Fax: (717) 605-3494

E-mail: Thomas_P_Mullin@icpmech.navy.mil

Additional information on the Navy Test, Measurement, and Diagnostic Program and new equipment contracts can be found at the Navy Test Equipment

Web Site: **<http://gpete-www.itd.nrl.navy.mil>**.

Approved for public release; distribution unlimited.

Contents

Measurement and Analysis Products

Analyzers

FFT Spectrum Analyzer	SR760	Stanford Research Systems	1
Scaler Network Analyzer	56100NV	Anritsu	2
Three Phase Power Analyzer	4300	Dranetz Technology	3
Audio Analyzer	1121	Boonton Electronics	4
Vector Network Analyzer	8722ES-92	Hewlett Packard	5
Microwave Spectrum Analyzer	E4407S-E57	Hewlett Packard	6

Signal Generators

Sweep Signal Generator	68369NV	Anritsu	7
Signal Generator	MG3641N	Anritsu	8

Function Generator

Function/Arbitrary Waveform Generator	33120A-E01	Hewlett Packard	9
---------------------------------------	------------	-----------------	---

Power Meters

Power Meter	E4418B-E23	Hewlett Packard	11
Power Meter	8501A-362	Gigatronics	12

Meters

Noise Figure Meter	8970B-E29	Hewlett Packard	13
Handheld Multimeter	77/BN	Fluke	14
Analog/Digital Multimeter	87	Fluke	15
Digital Micro-ohmmeter	R1L-B	PPM, Inc.	16
Power & Harmonics Meter	41B-AV	Fluke	17
Multimeter	34401A-102	Hewlett Packard	18
LCR Meter	7600	QuadTech, Inc.	19
Digital Multimeter	27AN	Fluke	20
Digital Multimeter	175-AV/53A/58	Keithley	21
Panel Meter Calibrator	1040C-03-05	Arbiter Systems	22
Modulation Meter	AMM20002Q	Wayne Kerr, Inc.	23
LCR Meter	WK7330	Wayne Kerr, Inc.	24
Digital Multimeter	2001-M	Keithley	25

Oscilloscopes

500 MHz Oscilloscope	54825N	Hewlett Packard	27
TekScope™ Handheld Digital Oscilloscope	THS720A	Tektronix	28
100 MHz Oscilloscope	54645A-E01	Hewlett Packard	29

Electronic Counters

Pulse/CW Microwave Frequency Counter	5361B-915	Hewlett Packard	31
CW Microwave Frequency Counter	5350B-001	Hewlett Packard	32
Electronic Counter	53131A-010-030-H14	Hewlett Packard	33

Fiber Optic Test Equipment

Mini Optical Time Domain Reflectometer	MW9070NV	Anritsu	35
Optical Time Domain Reflectometer	MTS 5200	Wavetek Wandel & Goltermann	36
Fiber Optical Leak Detector	PX-D603	Photonix Technologies	37
Optical Loss Test Set	OMK-10/N	Wavetek Wandel & Goltermann	38

Contents

Specialized Test Sets and Products

Network Test Instrumentation

LAN CableMeter	LT8155A	Wavetek Wandel & Goltermann	39
LANMeter	686	Fluke	40
LAN Protocol Analyzers	9314/51, 9314/52	Wavetek Wandel & Goltermann	41
LAN/WAN Protocol Analyzers	9314/53, 9314/54	Wavetek Wandel & Goltermann	42
LAN/WAN – ATM Chassis	9316/90.11	Wavetek Wandel & Goltermann	43
LAN/WAN – ATM DS-1	9316/90.12	Wavetek Wandel & Goltermann	43
LAN/WAN – ATM DS-3	9316/90.13	Wavetek Wandel & Goltermann	43
LAN/WAN – OC-3 Multimode	9316/90.14	Wavetek Wandel & Goltermann	43
LAN/WAN – OC-3 Single Mode	9316/90.15	Wavetek Wandel & Goltermann	43
LAN/WAN – OC-3 155 Mbps UTP	9316/90.16	Wavetek Wandel & Goltermann	43
LAN/WAN – ATM E-1	9305/90.73	Wavetek Wandel & Goltermann	43
LAN/WAN – Fast Ethernet	9316/01	Wavetek Wandel & Goltermann	43
LAN/WAN – Ethernet/Token Ring	9314/02	Wavetek Wandel & Goltermann	43
LAN/WAN – FDDI	9314/04	Wavetek Wandel & Goltermann	43
LAN/WAN – WAN	9314/01	Wavetek Wandel & Goltermann	43
LAN/WAN – Mentor Software	9314/93.33	Wavetek Wandel & Goltermann	43

Specialized Test Equipment

Radio Test Set	2947	IFR	45
Synthesized Oscillator	98	Wavetek Wandel & Goltermann	46
Pressure Calibrator System	3666-10K-2	King Nutronics	47
Test Set, Analog Signature	5100S/99-0315	Huntron Instruments	48
Test Set, Semiconductor	2000B	Huntron Instruments	49
Test Set, Semiconductor	2000B-HSR410	Huntron Instruments	49
Test Set, Radio Frequency	4410A500	Bird Electronics	50
Decade Resistor	R3-1,110M	PPM, Inc.	51
Decade Resistor	R6-111.111K	PPM, Inc.	52
Decade Resistor	R6-1,111.110K	PPM, Inc.	52
Bridge Resistance	R1L-D	PPM, Inc.	53
Telecommunications Test Set	FB-6000-NAVY-P1	TTC	54
Telecommunications Test Set	FB-6000-NAVY-P2	TTC	54
Multifunction Calibrator	5700A/AN-1	Fluke	55

Analyzers

FFT Spectrum Analyzer

SR760

NSN: 7Z6625-01-354-2925

Manufacturer:	Stanford Research Systems
Contract No.:	N00104-97-D-X201
SCAT:	4333
Expiration Date:	4/3/02
Price:	\$4,398

Product Features

The SR760 is a single channel, 100 kHz FFT Spectrum Analyzer with a dynamic range of 90 dB and a real-time bandwidth of 100 kHz. The instrument's speed and dynamic range, coupled with its flexibility and analysis modes including acoustics, vibration, noise measurement, and general electronic use, make it extremely versatile.



Key Specifications and Characteristics

FREQUENCY

Measurement Range:	476 μ Hz to 100 kHz, baseband and zoomed
Spans:	191 mHz to 100 kHz in a binary sequence
Center Frequency:	Anywhere within the 0 to 100 kHz measurement range
Accuracy:	25 ppm from 20°C to 40°C
Resolution:	Span/400
Window Functions:	Blackman-Harris, Hanning, Flattop and Uniform
Real-time Bandwidth:	100 kHz

SIGNAL INPUT

Number of Channels:	1
Input:	Single-ended or true differential
Input Impedance:	1 M Ω , 15 pF
Coupling:	ac or dc

AMPLITUDE

Full Scale Input:	-60 dBV (1.0 mVpk) to +34 dBV (50 Vpk) in 2 dB steps
Dynamic Range:	90 dB typical
Harmonic Distortion:	No greater than -90dB from dc to 50 kHz (input range \leq 0 dBV) No greater than -80dB to 100 kHz

Spurious:	Input range \geq -50 dBV: No greater than -85 dB below full scale below 200 Hz. No greater than -90 dB below full scale to 100 kHz
Input Sampling:	16-bit A/D at 256 kHz
Accuracy:	± 0.2 dB \pm 0.003% of full scale (excluding windowing effects)

TRIGGER INPUT

Modes:	Continuous, internal, external, or TTL
Internal Level:	Adjustable to $\pm 100\%$ of input scale Positive or negative slope
Minimum Trigger Amplitude:	10% of input range
External Level:	± 5 V in 40 mV steps Positive or negative slope 10 k Ω Impedance

DISPLAY FUNCTIONS

Display:	Real, Imaginary, Magnitude or Phase Spectrum
----------	----------------------------------------------

Analyzers

Scaler Network Analyzer

56100NV

NSN: 7Z6625-01-441-4885

Manufacturer:	Anritsu
Contract No.:	N00104-97-D-X102
SCAT:	4475
Expiration Date:	2/3/00
Price:	\$8,917



Product Features

The 56100NV Scaler Network Analyzer has four detector inputs and two independent channels for measurement and display of detected RF power from Anritsu 560-Series Detectors and SWR Autotesters. Two independent channels display RF power, transmission gain or loss, or reflected power. Measures and displays in dB swept transmission and return loss characteristics. Transmission and reflection measurements can be viewed simultaneously. Exceptional return loss accuracy is

attributable to the low synthesizer harmonics and spurious and the high directivity and exceptional test port match of the Anritsu SWR autotesters.

Key Specifications and Characteristics

MEASUREMENTS

Frequency Range:
Coax: 10 MHz to 18 GHz
Frequency Accuracy: Same as synthesizer
Inputs: 4; A, B, R1, R2
Dynamic Range: 76 dB (-60 dBm to +16 dBm)
Data Correction: System residuals stored for subtraction from test data.
Save/Recall: Nine sets of front panel settings for later recall

DISPLAY

Channels: Two, simultaneous display of any two of A, B, R1, R2, A/R1, A/R2, B/R1, B/R2
Alternate Sweep: Alternate between current and any of nine stored setups
Display Resolution:
Horizontal: 101, 201, 401 points
Vertical: 0.005 dB
Scaling:
Resolution: 0.1 to 10 dB/div in 0.1 dB steps
Offset Range: -99 dB to +99 dB in 0.1 dB steps
Autoscale: Auto selects res. and offset for optimum display
Averaging: 4, 8, 16, 32, 64, 128, 256 successive trace averaging

MARKERS AND CURSORS

Markers: Up to 10 numerically identified markers
Cursor Modes: Relative, Min/Max, X dB, X Bandwidth, Next Marker, Active Marker

INPUT AND OUTPUT CONNECTIONS

Horizontal Sweep Ramp In: 0 to +10 V
Sequential Sync In:
+3.5 V to +10 V: Retrace blanking
-3.5 V to -10 V: Defines a marker
-8 V to -10 V: Active Marker
Retrace Blanking In: +5 V
Video Marker In: ± 1 peak to ± 10 peak
Additional In/Out: System GPIB, Dedicated GPIB, Aux I/O, Parallel Printer

Three Phase Power Analyzer

4300

NSN: 7Z6625-01-461-4467

Manufacturer: Dranetz Technology
Contract No.: N00104-99-D-X003
SCAT: 4243
Expiration Date: 12/23/03
Price: \$7,492

Product Features

The Dranetz Model 4300 is a three-phase volt-amp-power-harmonic meter with 1 second updates of voltage, amperes, watts, VA, VAR, power factor, frequency, voltage unbalance, V&I total harmonic distortion, current crest factor, K factor, demand, energy, and harmonics. The unit provides real time viewing of voltage and current waveforms. The handheld model 4300 meets a wide range of applications.

Key Specifications and Characteristics

VOLTAGE MEASUREMENTS

4 Fully differential channels
10-600 Vrms; user selected 0.5-20Vrms on one channel
Accuracy: $\pm 1\%$ reading $\pm 0.05\%$ full scale

VOLTAGE TRANSIENTS

50-1000 Vpk; user selected 1-30Vpk on one channel
1 microsecond minimum duration
Accuracy: $\pm 10\%$ reading $\pm 1\%$ full scale

CURRENT MEASUREMENTS

4 Fully independent current channels
10-200% of full-scale current probe rating
Accuracy: $\pm 1\%$ reading $\pm 0.05\%$ full scale
(at fundamental, plus current probe accuracy)

CURRENT TRANSIENTS

10-300% CT full scale except Chan D 2-200%
CT full scale
1 microsecond minimum duration
Accuracy: $\pm 10\%$ reading $\pm 1\%$ full scale plus probe

FREQUENCY

Fundamental range 30-450 Hz
Accuracy: $\pm 0.2\%$ of reading

UPDATE RATES

All parameters updated once per second
(Harmonic-based parameters updated every 5 seconds)

ENVIRONMENT

40° F TO 113° F, +5° C TO +45° C,
HUMIDITY 10% - 90% non-condensing

BATTERY

2 hours operation, 3 hours full recharge
(continuous operation from battery eliminator)

Analyzers

AUDIO ANALYZER 1121

NSN: 7Z6625-01-458-5918

Manufacturer: Boonton Electronics
Contract No.: N00104-98-D-X115
SCAT: 4344
Expiration Date: 9/21/03
Price: \$4,937



Product Features

The Model 1121 Audio Analyzer is a low distortion audio source used for testing systems, amplifiers, receivers, and components. It covers 10 Hz to 200 kHz and incorporates selectable output impedances of 50, 150 and 600 ohms; 16 volt rms output; additional 0.3-millivolt full scale measurement range, and quasi-peek detection. The 1121 can be used as a direct replacement in present 1120 applications. The instrument automatically tunes and autoranges for maximum accuracy and resolution. Distortion, frequency response, AC and DC voltage

measurements are a single keystroke away. With a built in low distortion audio source, the instrument is ideally suited for stimulus response applications.

Key Specifications and Characteristics

FREQUENCY MEASUREMENT

Range: 5 Hz to 200 kHz

Resolution:

0.001 Hz; 5.000 Hz to 199.999 Hz
0.01 Hz; 200.00 Hz to 1999.99 Hz
0.1 Hz; 2.0000 kHz to 19.9999 kHz
1.0 Hz; 20.000 kHz to 199.999 kHz

Accuracy: Timebase accuracy +1 count

Sensitivity: 5.0 mV in the Frequency mode
50.0 mV in the Distortion and SINAD modes

Timebase
Type: 10 MHz TCXO

Accuracy: ± 1 ppm yr

AC LEVEL MEASUREMENT RANGES

300.0 V, 30.00 V, 3.000V, 300.0 mV,
30.00 mV, 3.000 mV and 0.300 mV
(full scale)

DC LEVEL MEASUREMENT RANGES

300.0 V, 30.00 V, 3.000V (full scales)

Distortion Measurement Fundamental
Frequency Range: 10 Hz to 100 kHz
usable to 140 kHz

Display Range: 0.00 to 140.00 dB

Accuracy: ± 1 dB; 20 Hz to 20 kHz
 ± 2 dB; 10 Hz to 100 kHz

Input Voltage Range: 50 mV to 300 V

Signal to Noise Measurement Frequency Range:
10 Hz to 100 kHz usable to 140 kHz

Display Range: 0.00 to 140.00 dB

Accuracy: ± 1 dB

Input Voltage Range: 50 mV to 300 V

Common Mode Rejection Ratio CMRR:
>70 dB; 20 Hz to 1 kHz $V_{in} < 3$ V
> 45 dB; 1 kHz to 20 kHz, $V_{in} < 3$ V

Power Requirements: 80 VA; 100, 200, 120, 220 or
240V, 50 to 400 Hz

Operating Temperature: 0° to 55° C

Analyzers

Vector Network Analyzer 8722ES-92

NSN: 7Z6625-01-462-7494

Manufacturer:	Hewlett Packard
Contract No.:	N00104-99-D-X004
SCAT:	4212
Expiration Date:	2/10/04
Price:	\$60,906

Product Features

The Hewlett Packard (HP) 8722ES vector network analyzer characterizes RF and microwave components down to 50 MHz and up to 40 GHz. This analyzer includes a fast-sweeping synthesized source, S-parameter test set, tuned receiver, and large color display in a single package. The HP 8722ES is an ideal choice for cost and pace conscious engineers in research and development, manufacturing, incoming inspection, or quality assurance. High source power and high receiver sensitivity combine to give the HP 8722ES 100dB of dynamic range. The serial and parallel interfaces support printers and plotters, and the built-in 3.5" floppy disk drive supports both DOS and LIF formats.



Key features are:

- Fast sweep speed, error correction, register recall, and data transfer.

- Integrated switching test set measures all four S-parameters with a single connection.

- Two independent display channels for simultaneous measurement of reflection and transmission characteristics.

- Simultaneously displays all four S-parameters while tuning devices.

- Optional time domain capability computes and displays response versus time or distance.

Key Specifications and Characteristics

SOURCE

Minimum Frequency:	50 MHz
Maximum Frequency:	40 GHz
Resolution:	1 Hz
Frequency Accuracy:	10 ppm

OUTPUT

Maximum Power:	-10 dBm
Minimum Power:	-75 dBm
Power Resolution:	0.01dB
Power Flatness:	±3 dB
Power Sweep Range:	15 dB

RECEIVER

Receiver Sensitivity:	>2 GHz: -92 dBm
System Dynamic Range:	> 2 GHz: 82 dB
Test Port Connector:	2.4 mm

TYPICAL MEASUREMENT RATE

1-Port Cal, Narrow Band Sweep:	93 ms
2-Port Cal, Narrow Band Sweep:	173 ms
1-Port Cal, Full Span Sweep:	696 ms
2-Port Cal, Full Span Sweep:	1376 ms

Analyzers

Microwave Spectrum Analyzer

E4407S-E57

NSN: 7Z6625-01-465-1844



Manufacturer:	Hewlett Packard
Contract No.:	N00104-99-D-X010
SCAT:	4338
Expiration Date:	6/17/04
Price:	\$13,935

Product Features

The HP E4407S-E57, general-purpose, portable spectrum analyzers offer engineers in R&D, manufacturing and field service faster measurement speed than comparably priced products. Engineers will also find that the superior dynamic range, accuracy and resolving power surpass other similarly priced analyzers.

Key Specifications and Characteristics

FREQUENCY RANGE

Frequency Range: 9 kHz to 40 GHz
Frequency Accuracy(at 1 GHz, 25 °C) ± 111 Hz
Span Accuracy: $\pm 1\%$
Noise Sidebands(at ≥ 10 kHz offset) ≤ -90 dBc/Hz
Residual FM: ≤ 2 Hz peak to peak in 100 ms
Resolution Bandwidth Range 10 Hz to 3 MHz, in 1-3-10 Sequence, 200 Hz, 9 kHz, 120 kHz and 5 MHz

AMPLITUDE SPECIFICATIONS

Measurement Range: -150 dBm to +30 dBm
Maximum Sensitivity: -150 dBm
Gain Compression: 0 dBm
Attenuator Range: 0 to 65 dB in 5 dB steps
Maximum Dynamic Range (2nd/3rd order) ≥ 90 dB/97 dB ≥ 101 dB, typical third order 20 °C to 30 °C
SHI (Second Harmonic Intercept) +45 dBm
TOI (Third Order Intercept) +11 dBm +16 dBm, typical 20 °C to 30 °C

Calibrated Display Range: 85 dB/120 dB
Overall Accuracy (20 °C to 30 °C, 0 to -50 dBm, 1 kHz RBW) 9 kHz to 3 GHz: ± 1.0 dB
3 GHz to 6.7 GHz: ± 2.0 dB
6.7 GHz to 40 GHz: ± 2.5 dB

SPEED SPECIFICATION

Minimum Sweep Time (3 GHz span RF) 5 ms
Minimum Zero Span Sweep Time 20 μ s
Remote Measurement and HP-IB Trace Transfer Rate (auto align off, 5 ms sweep time, fixed center frequency, display off) ≥ 19 /sec, characteristic
Local Measurement and Display Update Rate (auto align off, 5 ms sweep time, fixed center frequency) ≥ 28 /sec, characteristic
Warm-up Time: 5 minutes

Signal Generators

Sweep Signal Generator

68369NV

NSN: 7Z6625-01-425-2550

Manufacturer:	Anritsu
Contract No.:	N00104-96-D-N010
SCAT:	4380
Expiration Date:	3/4/01
Price:	\$17,169

Product Features

The 68369NV Sweep Signal Generator provides high performance and economy in full function microwave synthesized signal generators. High output and low spurious outputs make the 68369NV ideal for local oscillator duty. Simultaneous internal AM, FM, pulse, frequency sweep, and power sweep functions provide the signal generation power for signal simulation. Three separate frequency sweep-modes, analog, step, and manual-and step power sweep satisfy network analysis requirements.



Key Specifications and Characteristics

FREQUENCY

Range: 10 MHz to 40 GHz

Single-Sideband Phase Noise @ 10 kHz Offset From Carrier

600 MHz:	-86 dBc/Hz
2 GHz:	-86 dBc/Hz
20 GHz:	-78 dBc/Hz
40 GHz:	-72 dBc/Hz

CW MODE

Accuracy: Same as internal time base
Int. Time Base: $<2 \times 10^{-8}$ /day
Temperature: $<2 \times 10^{-8}/^{\circ}\text{C}$ (0 to 55°C)
Resolution: 0.1 Hz
Switching Time: <40 ms to be within 1 kHz of setting

AM Noise Floor: -145 dBm/Hz @ 0 dBm output

OUTPUT POWER

Continuously variable from maximum power out to -120 dBm (typical) in 0.01/dB setting.

Maximum Leveled Output Power:

0.01 to 2 GHz:	+11.0 dBm
2 to 20 GHz:	+7.0 dBm
20 to 40 GHz:	+3.0 dBm

ANALOG SWEEP MODE

Sweep Width: Independently selected from 1 MHz to full range continuous sweep
Sweep Time: 30 ms to 99 s
Accuracy: The lesser of ± 30 MHz or (± 2 MHz + 0.25% of sweep width) for sweep speeds of ≤ 50 MHz/ms

MODULATION

Two Internal Independent Sources

Sinusoidal Frequency Range:	0.1 Hz to 1 MHz
Resolution:	0.1 Hz
Wave Forms:	Sine, square wave, triangle positive ramp, negative ramp, noise
Internal/External AM:	0 to 50 kHz
Internal/External FM:	1 kHz to 10 MHz
External Pulse Modulation:	>80 dB on/off ratio
Internal Pulse Modulation:	Free running, triggered, gated, delayed, singlet, doublet, triplet, quadruplet

PHASE-LOCKED STEP SWEEP MODE

Sweep Width: 0.1 Hz to full range
Resolution: 0.1 Hz (minimum step size)
Accuracy: Same as internal time base
Number of Steps: Variable from 1 to 10,000
Plot alternate and manual sweep

SPECTRAL PURITY

Spurious Signals:

10 MHz to 50 MHz:	≤ 30 dBc
50 MHz to 2 GHz:	≤ 40 dBc
2 GHz to 20 GHz:	≤ 60 dBc
20 GHz to 40 GHz:	≤ 40 dBc

Signal Generators

Signal Generator

MG3641N

NSN: 7Z6625-01-443-0552



Manufacturer:	Anritsu
Contract No.:	N00104-97-D-X202
SCAT:	4370
Expiration Date:	4/28/02
Price:	\$6,885

Product Features

The MG3641N is a synthesized signal generator with excellent spurious and leakage characteristics. The generator can be used to test communication systems operating with a variety of modulation methods. The carrier frequency is produced by a high stability crystal oscillator and remains phase locked.

Key Specifications and Characteristics

CARRIER FREQUENCY

Range: 125 kHz to 1040 MHz
Resolution: 0.01 Hz
Accuracy: same as reference frequency
Int. Ref. Osc.: Frequency: 10 MHz
Aging: $\pm 2 \times 10^{-8}$ /day
Ext. Ref. Input: 5/10 MHz

OUTPUT LEVEL

Range: -143 to +17 dBm
Unit: dBm, dBmV, mV, μ V
Resolution: 0.01 dBm
Frequency Response: Flatness ± 0.5 dB relative to 0 dBm
Accuracy: ± 1 dB ($\leq +17$ dBm, ≥ 127 dBm)
 ± 3 dB (< -127 dBm),
with pulse modulation on
 ± 1 dB $\leq +12$ dBm ≥ -127 dBm
 ± 3 dB (< -127 dBm)
Impedance: 50 Ω , type N connector

SIGNAL PURITY

Spurious: Harmonics: < -30 dBc
Nonharmonics: < -100 dBc
(> 15 kHz offset)
Powerline: < -40 dBc (< 15 kHz offset)
SSB Phase Noise: < -130 dBc/Hz (> 512 MHz)
 < -136 dBc/Hz (< 512 MHz)
 < -80 dBc
Residual AM: CW (50 Hz to 15 kHz band)
Residual FM: < 5 Hz rms (> 10 MHz < 512 MHz)
 < 10 Hz rms (> 512 MHz)

AMPLITUDE MODULATION

Range: 0 to 100%
Resolution: 0.1%
Accuracy: $\pm(5\%$ of set value $+2\%)$
Distortion: < -40 dB (AM 30%)
 < -30 dB (AM 90%)
Incidental FM: < 200 Hz peak

FREQUENCY MODULATION

Deviation/Range:
0 kHz to 1 kHz (> 1 MHz, < 2 MHz)
0 kHz to 10 kHz (> 8 MHz, < 16 MHz)
0 kHz to 1024 kHz (> 512 MHz)
Modulation
Frequency Response: dc or 10 Hz to 20 kHz
(> 0.4 MHz, < 10 MHz)
dc or 10 Hz to 100 kHz
(> 10 MHz)

PULSE MODULATION

ON/OFF: > 80 dB
Rise Time/Fall Time: < 100 ns
Minimum Pulse Width: < 500 ns
Pulse Repetition: dc to 1 MHz

MODULATION SIGNAL SOURCE

Internal Modulation:Freq: 0.01 Hz to 400 kHz
(Int 1,2) Sinewave
Freq: 0.01 Hz to 50 kHz
(triangular, square, sawtooth wave)

External Modulation

Optimum Input Level: Approximately 2 Vp-p

AF OUTPUT

Output Level: 0 V to 4 Vp-p
Output Level
Resolution: 1 mVp-p
Impedance: 600 Ω , BNC connector on front panel

SWEEP FUNCTION

Sweep Parameter: Frequency, output level

Function Generators

Function/Arbitrary Waveform Generator

HP 33120A-E01

NSN: 7Z6625-01-416-4444

Manufacturer: Hewlett Packard
Contract No.: N00104-95-D-N007
SCAT: 4404
Expiration Date: 8/31/00
Price: \$1,124

Product Features

The HP 33120A-E01 Function/Arbitrary Waveform Generator is a high-performance, full-function 15 MHz synthesized function generator. It features sine, triangle, square, ramp, and noise waveforms, a 12-bit, 40 MSa/s, 16 k-deep arbitrary waveform generator, and both internal sweep and modulation capabilities. The HP 33120A is ideal for both bench and system applications.



Key Specifications and Characteristics

WAVEFORMS

Standard: Sine, square, triangle, ramp, noise, sin(x)/x, exponential rise, exponential fall, heartbeat, dc volts

Arbitrary:

Waveform Length: 8 points to 16,000 points
Amplitude Resolution: 12 bits (including sign)
Sample Rate: 40 MSa/s
Nonvolatile Memory: Four 16 K waveforms

Offset (into 50 Ω): ± 5 Vpk ac + dc offset $\leq 2 \times$ p-p amplitude

Offset Accuracy: $\pm 2\%$ of setting +2 mV, for square wave outputs add 2% of output amplitude additional error

Output Units: Vp-p, V rms, dB

FREQUENCY CHARACTERISTICS

Sine: 100 μ Hz to 15 MHz
Square: 100 μ Hz to 15 MHz
Triangle: 100 μ Hz to 100 kHz
Ramp: 100 μ Hz to 100 kHz
Noise (Gaussian): 10 MHz bandwidth
Resolution: 10 μ Hz or 10 digits

MODULATION

AM:

Carrier -3dB Frequency: 15 mHz (typical)
Modulation: Any internal waveform including Arb
Frequency: 10 mHz to 20 kHz
Depth: 0% to 120%
Source: internal/external

FM:

Modulation: Any internal waveform including Arb
Frequency: 10 mHz to 10 kHz
Peak Deviation: 10 mHz to 15 MHz
Source: Internal only

FSK:

Internal Rate: 10 mHz to 50 kHz
Frequency Range: 10 mHz to 15 MHz
Source: Internal or external (1 MHz maximum)

Burst:

Carrier Frequency: 5 MHz maximum
Count: 1 cycle to 50,000 cycles or infinite
Start Phase: -360° to $+360^\circ$
Internal Rate: 10 mHz to 50 kHz $\pm 1\%$
Gate Source: Internal or external gate
Trigger Source: Single, external, or internal rate

SINEWAVE SPECTRAL PURITY

Harmonic Distortion:

dc to 20 kHz -70 dBc
20 kHz to 100 kHz -60 dBc
100 kHz to 1 MHz -45 dBc
1 MHz to 15 MHz -35 dBc

Total Harmonic Distortion: $<0.04\%$ (dc to 20 kHz)

Phase Noise: ≤ 55 dBc in a 30 kHz band

OUTPUT CHARACTERISTICS

Amplitude (into 50 Ω): 50 mVp-p to 10 Vp-p

Flatness (sinewave relative to 1 kHz)

<100 kHz: $\pm 1\%$ (0.1 dB)
100 kHz to 1 MHz: $\pm 1.5\%$ (0.15 dB)
1 MHz to 15 MHz: $\pm 2\%$ (0.2 dB)

Amplitude Accuracy: $\pm 1\%$ of specified output

Output Impedance: 50 Ω (fixed)

Power Meters

Power Meter

HP E4418B-E23

NSN: 726625-01-456-8768

Manufacturer: Hewlett Packard
Contract No.: N00104-95-D-LA07
SCAT: 4957
Expiration Date: 1/13/00
Price: \$2,086

Product Features

The HP E4418B is a low cost, high performance, single-channel, programmable power meter. It is fully compatible with the HP 8480 series of power sensors and the E-series of power sensors. Depending upon which sensor is used, the HP E4418B can measure from -70 dBm to +44 dBm at frequencies from 100 kHz to 110 GHz.



Key Specifications and Characteristics

METER

Frequency Range: 100 kHz to 110 GHz, sensor dependent.
Power Range: -70 dBm to +44 dBm (100 pW to 25 W) sensor dependent.
Power Sensors: Compatible with all HP 8480-series sensors and ECP-series sensors.
Single Sensor
Dynamic Range: 90 dB maximum (HP E-series sensor)
50 dB maximum (HP 8480-series sensors)
Display Units: Absolute: watts or dBm
Relative: percent or dB
Display Resolution: Selectable resolution of 1.0, 0.1, 0.01 , and 0.001 dB in log mode; or 1 to 4 digits in linear mode.
Default Resolution: 0.01 dB in log mode, 3 digits in linear mode

ACCURACY

Instrumentation

Absolute: ± 0.02 dB (log) or $\pm 0.5\%$ (linear) Note: add the corresponding power sensor linearity percentage
Rel Mode: ± 0.04 dB(log) or $\pm 1.0\%$ (linear). Note: add the corresponding power sensor linearity percentage

POWER

Power Output: 1.00 mW (0.0dBm). Factory set to $\pm 0.7\%$, traceable to the U.S. National Institute of Standards and Technology (NIST)

SENSORS: 8481A

Frequency Range: 10 MHz to 18 GHz
Sensitivity: -30 dBm to +20 dBm
SWR: < 1.40
Max Power Input: 300 mW average, 15 Wpk, 30 W- μ s per pulse
Connector: Type-N (male)

SENSORS: 8481D

Frequency Range: 10 MHz to 18 GHz
Sensitivity: -70 dBm to -20 dBm
SWR: < 1.40
Max Power Input: 100 mW average
Connector: Type-N (male)

Power Meters

Power Meter

8501A - 362

NSN: 7Z6625-01-412-6479

Manufacturer:	Giga-tronics
Contract No.:	N00104-99-D-X009
SCAT:	4920
Expiration Date:	4/29/04
Price:	\$8,480



Product Features

The 8501A Series Peak Power Meter measures peak power from +20 dBm to -20 dBm and CW power from +20 dBm to -40 dBm. Power readings are displayed on an LCD display using the readout mode.

Pulse profiles can also be displayed, using the display GRAPH mode together with amplitude and timing information for the pulse waveform. Pulse risetime, falltime, and pulse width measurements can be accurately and easily made using built-in markers.

Balanced diode power sensors are used to minimize errors due to phase changes of even order harmonics. The low-input VSWR minimizes mismatch errors to improve accuracy. The diode elements are field replaceable.

Key Specifications and Characteristics

FREQUENCY RANGE

30 MHz to 18 GHz

POWER RANGE

Pulse: -20 dBm to +20 dBm

CW: -40 dBm to +20 dBm

ACCURACY

Calibrator Power

Uncertainty: $\pm 1.5\%$ (at 0 dBm)

Linearity After

Automatic Calibration: $\pm 3\%$ (at stable temp.)

TIME BASE RANGE

1.2 ns/div to 20 ms/div

(12 ns to 200 ms time window)

TRIGGER DELAY RANGE

0 to 200 ms

Resolution: 0.1 ns

Accuracy: 0.01% of delay, ± 1 ns

TRIGGERING MODES

Internal: -10 dBm to +16 dBm

External (BNC): TTL levels, max PRF 1 MHz

MARKERS

Up to four markers/channel plus a Reference Power Level cursor

GRAPH DISPLAY MODE

Plots the outline of the detected pulse on the LCD display. Also provides readout of amplitude and timing information.

CALIBRATOR

Frequency: 1 GHz $\pm 5\%$

Power Uncertainty

at 1mW: $\pm 1.5\%$, directly traceable to NIST

Return Loss at 1 mW: >25 dB

Self calibration Time: <1 min

Connector: Type N

GPIO INTERFACE

In accordance with IEEE STD 488-1978

REMOTE OPERATION

Complete setup and measurement capabilities accessible via GPIO (IEEE-488). Reporting of errors, malfunctions, operational status and self-test diagnostics available through serial poll capability.

Noise Figure Meter HP 8970B-E23

NSN: 7Z6625-01-311-1704

Manufacturer: Hewlett Packard
Contract No.: N00104-98-D-X110
SCAT: 4329
Expiration Date: 6/24/03
Price: \$17,549

Product Features

The HP 8970B-E23 Noise Figure Meter with its 346C noise source provides easy, accurate, and repeatable noise figure measurements at frequencies up to 26.5 GHz. In addition, the wide dynamic range of the 8970B allows simultaneous gain measurements up to 40 dB or loss measurements to 20 dB, with no external attenuation or amplification. Low instrumentation uncertainty (0.1 dB) and automatic second stage correction make accurate noise figure readings possible even for low-gain devices.



Key Specifications and Characteristics

NOISE FIGURE MEASUREMENT

Measurement Range: 0 dB to 30 dB
Uncertainty: ≤ 0.1 dB
Resolution: 0.01 dB

Maximum SWR (Reflection Coefficient) On and Off:
HP 346C: 10 MHz to 18 GHz to 1.25 (0.11); 18 GHz to 26.5 GHz to 1.35 (0.15)

GAIN MEASUREMENT

Range: -20 dB to +40 dB
Uncertainty: 0.15 dB
Resolution: 2-9.99 dB Gain: 0.01 dB;
Gain ≥ 9.99 dB: 0.1 dB

Power Required: 28 ± 1 Vdc
Size: 21 mm x 140 mm x 30 mm
(0.8 in. x 5.5 in. x 1.2 in.)
Weight: Net, 0.108 kg (3.5 oz); shipping,
0.5 kg (1 lb)

Standard Connector: APC-3.5 (male)

INPUT SPECIFICATIONS

Frequency Range: 10 MHz to 1600 MHz
Tune Accuracy
(10°C to 40°C): 1 MHz + 1% of frequency;
6 MHz maximum

SUPPLEMENTAL CHARACTERISTICS

Bandwidth: 4 MHz (approximately)
Sensitivity: -100 dBm
Max Input Level: <20 Vdc; +20 dBm

NOISE SOURCE

Frequency Range: HP 346C: 10 MHz to 26.5 GHz

Excess Noise Ratio
(ENR) Limits:

HP 346C: 12 dB to 16 dB
(10 MHz to 12 GHz) and
14 dB to 17 dB (12.0GHz
to 26.5 GHz)

Meters

Handheld Multimeter

77/BN

NSN: 1H6625-01-336-3372



Manufacturer:	Fluke
Contract No.:	N00104-96-D-N009
SCAT:	4245
Expiration Date:	2/5/01
Price:	\$83

Product Features

The 77/BN Handheld Multimeter provides voltage, current, and resistance measurements and includes range hold, which simplifies go no-go and “dipping” measurements. It provides audible tones for continuity measurements and standard semiconductor voltage drop measurements. The Touch Hold feature allows storing the display value even after the test probes are removed from the circuit under test.

Key Specifications and Characteristics

VOLTAGE

DC Volts: 0 V to 1,000 V $\pm(0.3\% + 1 \text{ count})$
AC Conversion: ac-coupled, average responding, and calibrated to the rms value of a sine wave input
Best Resolution: 0.1 mV in 320 mV range
Input Impedance: 10 M Ω nominal, <50 pF
DC Volts Normal Mode Rejection: >60 dB @ 50 Hz or 60 Hz
DC Volts Common Mode Rejection Ratio: >120 dB @ dc
AC Volts Common Mode Rejection Ratio: >60 dB
Overload Protection: 1000 Vdc (500 V dc, 500 Vac {sine} on mV range), 750 Vac rms (sine)

CURRENT

DC: 0 to 10.00A $\pm(1.5\% + 2 \text{ counts})$ to 20.00A for 30 s max
AC Conversion: Same as voltage
Best Resolution: 0.01mA in 32mA range, 0.01A in 10A range
Burden Voltage: 6 mV/mA for mA input, 50 mV/A for A input
Input Protection: mA to 630mA, 250V FAST fuse A to 15A, 600V FAST fuse

OHMS AND DIODE TEST

Ohms: 32 M Ω range $\pm (2\% + 1)$
Diode Test: To 2.0 V
Continuity: Continuous tone (4096 Hz) for resistance < 150 Ω
Overload Protection: 500 Vdc or rms (sine)
Open Circuit Voltage: <3.1 Vdc (diode test); <3.1 Vdc (Ω)

Full Scale Voltage (Ω): <440 mVdc to 3.2 M Ω , <1.4 Vdc for 32 M Ω

ENVIRONMENTAL

Operating Temperature: 0°C to 50°C
Storage Temperature: -40°C to 60°C
Temperature Coefficient: 0.1 x (specified accuracy)/°C (<18°C or >28°C)
Relative Humidity: 0% to 90% (0°C to 35°C); 0% to 70% (35°C to 50°C)
Shock, Vibration: Per MIL-T-28800

GENERAL SPECIFICATIONS

Maximum Voltage to Earth: 1000 Vdc, 750 Vac rms (sine)
Battery Type: 9 V, NEDA 1604 or 6F22 or 006P
Battery Life: 2000 h typical (alkaline)
Size: 166 mm L x 75 mm W x 28 mm H (6.55 in. L x 2.95 in. W x 1.12 in. H)
Weight: 340g (12 oz) without holster
Automatic Touch Hold: Automatically holds each new reading; beeps when reading is stable; automatically reset between readings
Display: 3200 counts, updates 2.5/s
Analog: 31 segments, update rate 25/s
Voltage

Analog/Digital Multimeter

87

NSN: 1H6625-01-312-2930

Manufacturer:	Fluke
Contract No.:	N00104-97-D-N006
SCAT:	4249
Expiration Date:	11/27/01
Price:	\$215

Product Features

The 87 Analog/Digital Multimeter provides 11 functions for electronic and industrial applications, including high performance dc/ac voltage and current measurement, frequency, duty cycle, resistance, conductance, and capacitance measurement. The Min/Max/Average mode stores the highest, lowest, and 36-h average of all readings, allowing signal monitoring for seconds or days. Meets UL3111, CSA C22.2 No. 1010, and TUV to EN61010 listing.



Key Specifications and Characteristics

DC VOLTAGE

Range: 400 mV to 1000 V
Accuracy: $\pm(0.1\% + 1)$
Resolution: 0.1 mV

AC VOLTAGE

Range: 400 mV to 1000 V
Accuracy: $\pm(0.7\% + 2)$
Resolution: 0.1 mV

DC CURRENT

Range: 400mA to 10A
(up to 20 A for <30 s)
Accuracy: $\pm(0.2\% + 2)$
Resolution: 0.1mA

AC CURRENT

Range: 400mA to 10A
(up to 20 A for <30 s)
Accuracy: $\pm(1\% + 2)$
Resolution: 0.1mA

RESISTANCE

Range: 400 Ω to 40 M Ω
Accuracy: $\pm(0.2\% + 1)$
Resolution: 0.1 Ω

CONDUCTANCE

Range: 40 ns
Accuracy: $\pm(1\% + 10)$
Resolution: 0.01 ns

CAPACITANCE

Range: 5 nF to 5 mF
Accuracy: $\pm(1\% + 2)$
Resolution: 0.01 nF

FREQUENCY

Range: 199.9 Hz to 199.9 kHz
Accuracy: $\pm(0.005\% + 1)$
Resolution: 0.01 Hz

DISPLAY

Digital: 4000 counts
(Selectable 19,999 count resolution)
Analog: Pointer

FEATURES

Auto and manual ranging
Min/Max recording
Relative mode
True rms voltage and current
Touch-hold
Rugged, o-ring sealed case
Sealed battery/fuse doors
Min/Max relative mode
Audible continuity/diode test
EMI shielded

Meters

Digital Micro-ohmmeter

R1L-B

NSN: 7Z6625-01-350-8774

Manufacturer:	PPM, Inc.
Contract No.:	N00104-97-D-N005
SCAT:	4445
Expiration Date:	11/27/99
Price:	\$889



Product Features

The portable, R1L-B Digital Micro-ohmmeter is designed to measure low values of resistance, using the four-wire technique to eliminate errors caused by the resistance of the connections. Two leads are used to source and sink a regulated constant current through the resistance under test, and two separate leads are used to measure the voltage drop across this resistance. The resistance of the connection device does not affect the current, which is regulated and remains constant despite large changes in the unknown resistance and/or the resistance of the connections. The resistance of the connections in the voltage leads causes a negligible drop in the voltage because the impedance of the internal digital voltmeter is extremely high.

The R1L-B is packaged in a rugged housing designed to withstand the wear and tear of industrial usage. The digital voltmeter display is not only easier to read accurately, but it will withstand much more abuse than an analog meter movement.

Key Specifications and Characteristics

RANGES

2 m Ω
20 m Ω
200 m Ω
2 Ω
20 Ω

TEST CURRENTS

2 m Ω Range: 1.5A
20 m Ω Range: 150mA
200 m Ω Range: 15mA
2 Ω Range: 1.5mA
20 Ω Range: 0.15mA

CONTROLS

Power ON/OFF switch
OHMS FULL SCALE Selector Switch to select the resistance range

DISPLAY

3-1/2 digit display with decimal points, reading from 1.999 to 199.9, as described above. Over range reading indicated by displaying 1 and blanks.

TERMINALS

Terminals are four low-thermal binding posts for making the four-wire connection to the resistance under test.

ACCURACY

Maximum Error <0.25% of reading ± 2 digits.

CALIBRATION

The R1L-B will operate as specified for at least one year without the necessity of recalibration. To recalibrate this unit, internal trimpots may be adjusted to recalibrate all ranges.

Power & Harmonics Meter

41B-AV

NSN: 7Z6625-01-438-5312

Manufacturer: Fluke.
Contract No.: N00104-98-D-X113
SCAT: 4247
Expiration Date: 5/17/03
Price: \$935

Product Features

The Fluke 41B can be used to measure active power and power factor for single or 3-phase loads. The liquid crystal display is easy to read and provides accurate voltage/amp/watt measurements.

Key Specifications and Characteristics

RANGE/LEVELS

Range: 6-65 Hz and DC s

Minimum Input Levels: 5V rms or 1A rms

VOLTS MEASUREMENTS (TRUE-RMS)

Input Range: 5.0V to 600V rms (ac + dc),
5.0V to ± 933 V peak

Basic Accuracy: rms (ac + dc): $\pm(0.5\% + 2 \text{ digits})$
peak, dc: $\pm(2\% + 3 \text{ digits})$

Input Impedance: 1 MW, balanced

AMP MEASUREMENTS (TRUE-RMS)

(1 mV/A) Isolated Input

Input Range

0.0mV (A) to 1000 mV rms (A) (ac + dc)

1.0mV (A) to ± 2000 mV (A) peak

Basic Accuracy

rms (ac + dc): $\pm(0.5\% + 3 \text{ digits}) + \text{probe specs}$

peak, dc: $\pm(2\% + 4 \text{ digits}) + \text{probe specs}$

Input Impedance

$1\text{M}\Omega \parallel 47 \text{ pF}$

WATTS MEASUREMENTS (VOLT-AMPS)

(1mV/A) Isolated Input

Range: 0W (VA) to 600 kW (kVA) average

0W (VA) to 2000 kW (kVA) peak, Accuracy (ac + dc),

Active W (VA): $\pm(1\% = 4 \text{ digits}) + \text{probe specs}$

HARMONICS MEASUREMENT ACCURACY

(Cursor Data)

(Harmonic Level $>5\%$ Using Smooth - 20)

Volts

Fundamental to 13th Harmonic:

$\pm(2\% + 2 \text{ digits})$

13th to 31st Harmonic:

13th ($\pm(2\% + 2 \text{ digits})$)-

-31st ($\pm(8\% + 3 \text{ digits}) + \text{probe specs}$)

Amps or Watts

Fundamental to 13th Harmonic:

$\pm(3\% + 3 \text{ digits}) + \text{probe specs}$

13th to 31st Harmonic:

13th ($\pm(3\% + 3 \text{ digits}) + \text{probe specs}$

-31st ($\pm(8\% + 3 \text{ digits}) + \text{probe specs}$)

Meters

Multimeter

34401A-102

NSN: 7Z6625-01-375-8765

Manufacturer:	Hewlett Packard
Contract No.:	N00104-97-D-X206
SCAT:	4211
Expiration Date:	7/17/00
Price:	\$797



Product Features

The Hewlett Packard 34401A is a digital multimeter featuring 6.5 digits of resolution, 1000 readings per second, and 15 ppm basic dc accuracy. The meter is capable of storing 512 readings in internal memory and is controllable via HP-IB or RS-232. The instrument includes “traditional” bench functions and math functions such as NUL, dB, dBm, limit test, and min/max/avg. A total of 12 measurement functions are available with a maximum input of 1000 V.

Key Specifications and Characteristics

DC VOLTAGE ACCURACY

Range DC	6.5 Digits	Accuracy : 1 year
Voltage:	Resolution:	(%reading & %range)
100 mV	100 nV	0.0050 + 0.0035
1 V	1 μ V	0.0040 + 0.0007
10 V	10 μ V	0.0035 + 0.0005
100 V	100 μ V	0.0045 + 0.0006
1000 V	1 mV	0.0045 + 0.0010

TRUE RMS AC VOLTAGE ACCURACY

	Frequency:	Accuracy: 1 year (%reading + %range)
100 mv	3 Hz to 5 Hz	1.00 + 0.04
Range:	5 Hz to 10 Hz	0.35 + 0.04
	10 Hz to 20 kHz	0.06 + 0.04
	20 kHz to 50 kHz	0.12 + 0.04
	50 kHz to 100 kHz	0.60 + 0.08
	100 kHz to 300 kHz	4.00 + 0.50
1V-750V		
Ranges:	3 Hz to 5 Hz	1.00 + 0.03
	5 Hz to 10 Hz	0.35 + 0.03
	10 Hz to 20 kHz	0.06 + 0.03
	20 kHz to 50 kHz	0.12 + 0.05
	50 kHz to 100 kHz	0.60 + 0.08
	100 kHz to 300 kHz	4.00 + 0.50

RESISTANCE ACCURACY

Range:	Resolution:	Accuracy : 1 year
		(%reading & %range)
100 Ω	100 $\mu\Omega$	0.010 + 0.004
1 k Ω	1 m Ω	0.010 + 0.001
10 k Ω	10 m Ω	0.010 + 0.001
100 k Ω	100 m Ω	0.010 + 0.001
1 M Ω	1 Ω	0.010 + 0.001
10 M Ω	10 Ω	0.040 + 0.001
100 M Ω	100 Ω	0.800 + 0.010

ADDITIONAL SPECIFICATIONS

DC Current Accuracy: 0.05% of reading + 0.005% of range
(100 mA range)

AC Current Accuracy: 0.1% of reading + 0.04% of range
(10 Hz to 5 kHz 1 A range)

Frequency (and Period): 0.01% of reading
(40 Hz to 300 kHz,
0.333 s to 3.33 μ s)

Continuity: 0.010% of reading + 0.020% of range
(1000 Ω range,
1 mA test current)

Diode Test: 0.010% of reading + 0.020% of range
1 V range,
1 mA test current

GENERAL SPECIFICATIONS

Maximum Input:
DC and AC Current: 1000 Vdc, 750 Vrms ac
3A, from <250 V source
double fused

Power: 100/120/220/240 V
45-60 Hz, 360-440 Hz

Net Weight: 3 kg (6.6 lb)
Size: 88.5 mm H \times 212.6 mm W
 \times 348.3 mm D
(3.5 in. \times 8.4 in. \times 13.7 in.)

Manufacturer: QuadTech Inc.
Contract No.: N00104-98-D-X117
SCAT: 4251
Expiration Date: 9/23/03
Price: \$6,314

LCR Meter 7600

NSN: 7Z6625-01-458-6369

Product Features

The QuadTech Model 7600 provides precision impedance measurements over a wide frequency range. New features include the ability to measure and display any two parameters simultaneously to achieve coverage and flexibility not previously available. It runs up to six different tests in sequence with a single push of the start button. The unit provides fast and accurate sweep parameter measurements, for verification of component and material response to changes in ac test frequency, ac test voltage or ac test current without the need for complex programming or an external controller.

Test setups can be stored and recalled either from internal memory or from standard DOS formatted 3-1/2" floppy disks. The front panel controls can be locked out, with password protection, to ensure procedures are run the same way every time. Measured data can be stored on a floppy disk and then transferred to PC for data reduction and analysis.

Key Specifications and Characteristics

Test		
Frequency:	Range 10 Hz to 500 kHz, continuous	DC Bias Voltage: Internal: 2.0V
Resolution:	0.1 Hz from 10 Hz to 10 kHz, 5 digits > 10 kHz Accuracy: +/- 0.25%	External Range: 0 to +200V standard or +/- 500 V optional
Measurement Speed:	Basic: 40 meas/sec Enhanced: 8 meas/sec Extended: 1 meas/sec	Key Features: - Fourteen measurement parameters - Wide measurement ranges with six digits of resolution - Fully programmable test frequency - Menu driven interface for user friendly operation - Measurement auto ranging or manual hold - Programmable delay time from 0 to 1000 msec - Measurement averaging from 1 to 1000 - IEEE-488.2, RS-232, handler, and parallel printer interfaces, all standard
Ranging:	Automatic, Range Hold or user selectable	
Trigger:	Internal (automatic) External (via RS-232, IEEE 488.2 or Handler interfaces) Manual	
AC Test Signal:	Voltage: 20 mV to 5.0 V (open circuit) up to 500 kHz 20 mV to 1.0 V (open circuit) 500 kHz - 2 MHz	
Current:	250mV to 100mA	

Meters

Analog/Digital Multimeter

27/AN

NSN: 9N6625-01-238-8248

Manufacturer:	Fluke
Contract No.:	N00104-99-D-X007
SCAT:	4212
Expiration Date:	3/17/04
Price:	\$482



Product Features

The Fluke 27/AN Analog/Digital Multimeter combines accurate digital and analog measurement capability with extreme ruggedness and durability. It is totally sealed and tough enough to withstand water, contaminants, chemicals, accidental drops, and severe electrical overloads. The meter is MSHA approved and has met UL1244, CSA C22.2 No. 231, and VDE to IEC 348 testing.

FEATURES:

- Auto and manual ranging
- Touch-hold
- Rugged, o-ring sealed case
- Sealed battery/fuse doors
- Min/Max relative mode
- Audible continuity/diode test
- EMI shielded
- Battery Life: >1000 h (alkaline)

Key Specifications and Characteristics

DC VOLTAGE

Range: 320 mV to 1000 V
Accuracy: $\pm(0.1\% + 1)$
Resolution: 0.1 mV

AC VOLTAGE

Range: 320 mV to 1000 V
Accuracy: $\pm(0.5\% + 3)$
Resolution: 0.1 mV

DC CURRENT

Range: 320 μ A to 10 A
Accuracy: $\pm(0.75\% + 2)$
Resolution: 0.1 μ A

AC CURRENT

Range: 320 μ A to 10 A
Accuracy: $\pm(1.5\% + 2)$
Resolution: 0.1 μ A

RESISTANCE

Range: 320 Ω to 32 M Ω
Accuracy: $\pm(0.2\% + 1)$
Resolution: 0.1 Ω

CONDUCTANCE

Range: 32 nS
Accuracy: $\pm(2\% + 10)$
Resolution: 0.01 nS

DISPLAY

Digital: 3200 counts
Analog Bar Graph: 31 segments

Meters

Manufacturer: Keithley
 Contract No.: N00104-97-D-X203
 SCAT: 4212
 Expiration Date: 5/7/02
 Price: \$1,031

Digital Multimeter

175-AV/53A/58

NSN: 7Z6625-01-443-9922

Product Features

The Keithley Model 175A is a 4-1/2 digit LCD bench/portable Digital Multimeter with 0.03% basic DCV accuracy. It offers extended measurement capabilities including a 10A current range, 100 kHz bandwidth, and resistance measurements from 10 megaohms to 200 megaohms. Annunciators provide function, range, and feature indication. With the model 175A the user can choose either manual or auto-ranging. Fast auto-ranging is available on DC volts, ohms, AC volts, and dB. The Model 175A is suitable for audio and communications applications.



Key Specifications and Characteristics

DC VOLTS

<u>RANGE</u>	<u>RESOLUTION</u>	<u>INPUT RESISTANCE</u>	<u>ACCURACY</u>
200 mV	10 μ V	>1 G Ω	0.03 + 2
2 V	100 μ V	>1 G Ω	0.03 + 1
20 V	1 mV	11 M Ω	0.03 + 1
200 V	10 mV	10 M Ω	0.03 + 1
1000 V	100 mV	10 M Ω	0.03 + 1

TRMS AC VOLTS

<u>RANGE</u>	<u>20Hz-50Hz</u>	<u>50Hz - 10kHz</u>	<u>10kHz-20kHz</u>	<u>20kHz-50kHz</u>	<u>50kHz-100kHz</u>
2V-750V	1 + 20	0.5 + 20	1 + 40	2.5 + 75	5 + 200
200 mV	1 + 20	0.5 + 20	1.5 + 40	8 + 75	--

DC AMPS

<u>RANGE</u>	<u>RESOLUTION</u>	<u>BURDEN</u>	<u>ACCURACY</u>
200 μ A	10 nA	0.3 V	0.15 + 2
2 mA	100 nA	0.3 V	0.15 + 2
20 mA	1 μ A	0.3 V	0.15 + 2
200 mA	10 μ A	0.3 V	0.2 + 2
2000 mA	100 μ A	0.8 V	0.2 + 2
10 A	1 mA	0.3 V	0.5 + 2

TRMS AC AMPS

<u>RANGE</u>	<u>BURDEN</u>	<u>20Hz - 50 Hz</u>	<u>50Hz - 10 kHz</u>	<u>10kHz - 30kHz</u>
200uA-20mA	0.3V	1 + 20	0.8 + 20	2 + 50
20 mA	0.3V	1 + 20	0.8 + 20	--
2000 mA	0.8V	1 + 20	0.8 + 20	--
10 A	0.3V	1.5 + 20	1 + 20	--

Meters

Panel Meter Calibrator

1040C-03-05

NSN: 7Z6625-01-331-3049

Manufacturer:	Arbiter Systems
Contract No.:	N00104-98-D-X109
SCAT:	4926
Expiration Date:	6/15/03
Price:	\$16,262

Product Features

The Arbiter Systems, Inc. Model 1040C Panel Meter Calibrator (PMC) is a compact, portable, and lightweight unit which provides eight calibration functions: voltage, current, frequency, power, power factor, phase, VARs and synchroscope. With all of these functions in one ruggedized instrument, the user can easily calibrate virtually every type of panel meter and many types of transducers, circuit breakers and overcurrent relays. A hand-held control is also provided to operate the Model 1040C at a distance when calibrating panel meters in a control room or substation.

Key Specifications and Characteristics

VOLTAGE

Output Range:	10 to 1000 Vdc 1.5 to 750 Vrms
Accuracy	$\pm(0.2\% \text{ setting} + 0.05\% \text{ FS})^1$ (dc)
≤ 50 Vrms	$\pm(0.2\% \text{ setting} + 0.05\% \text{ FS})^1$
> 150 Vrms	$\pm(0.2\% \text{ setting} + 0.1\% \text{ FS})^1$
Burden	15 mA; 25 mA overload (dc)
≤ 150 Vrms	300 mArms
> 150 Vrms	10 VA
Noise (dc)	$\leq 0.25\% \text{ setting}$; 10 kHz BW
Distortion	$\leq 0.45\%$

CURRENT

Output Range:	0.1 mA to 10.5 Adc 0.1 to 7.5 Arms
Accuracy	$\pm(0.2\% \text{ setting} + 0.05\% \text{ FS})^2$ (dc)
≤ 150 Arms	$\pm(0.2\% \text{ setting} + 0.05\% \text{ FS})^2$
> 150 Arms	$\pm(0.2\% \text{ setting} + 0.1\% \text{ FS})^2$
Compliance	6 Vrms: 6.5 V overload (ac)
≤ 50 Adc	12 Vdc; 12.5 V overload
> 50 Adc	3 Vdc; 3.5 V overload
Noise (dc)	$\leq 0.25\% \text{ setting}$; 10 kHz BW
Distortion (ac)	$\leq 0.45\%$

¹ Internal voltage ranges have full-scale (FS) values of 105 mV, 1.05 V, 10.5V, 105V, and 1000 V 9dc), and 15.75 Vrms, 157.5 Vrms, and 750 Vrms (ac).

² Internal current ranges have full-sale (FS) values of 1.05mA, 10.5 mA, 105 mA, 1.05 A, and 10.5 A (dc), and 1.05 Arms, and 7.5 Arms (ac).

FREQUENCY - AC OPERATION

Ranges:	50 to 75 Hz 333.3 to 500 Hz
Accuracy:	0.01%

GENERAL

Stability:	$<(0.03\% \text{ setting} + 0.015\% \text{ FS})^{1,2}$ Averaged one minute or longer
Resolution:	$<0.1\% \text{ setting}$
Setting Time:	8 seconds max.

AC POWER

Range:	1.5 to 5625 VA
Current:	0.1 to 7.5 Arms
Voltage:	15 to 750 Vrms
PhaseAngle:	$0E \pm 0.33^\circ$
Stability:	$<(0.6\% \text{ setting} + 0.03\% \text{ FS})$ Averaged one minute or longer

Other ac power specifications are derived from the individual specifications for current and voltage.

PHASE , POWER FACTOR , VARs

PhaseAngle:	$+180^\circ$ to -180°
Accuracy:	$\pm 0.33^\circ$
Stability:	$<0.2^\circ$ rms, averaged on minute or longer
Resolution:	0.01°

Meters

Manufacturer:	Wayne Kerr, Inc.
Contract No.:	N00104-98-D-X116
SCAT:	4262
Expiration Date:	9/22/03
Price:	\$7,117

Modulation Meter

AMM20002Q

NSN: 7Z6625-01-458-5920

Product Features

The AMM20002QC Automatic Modulation Meter from Wayne Kerr Electronics incorporates all the features needed to quickly characterize baseband and modulated carrier signals from transmitters and communications transceivers operating in the range 150kHz to 2.4 GHz. Specification and performance is intended for systems or bench use but the AMM20002QC is compact and lightweight and can be operated from external low voltage. AM, FM and PM (phase modulation) measurements to a basic accuracy of better than 1 % is achieved by using a built-in digital self-calibration source. The modulation bandwidth is a full 10 Hz to 300 kHz (down to DC for FM) allowing measurements on high data rate systems.

Key Specifications and Characteristics

RF INPUT

Frequency Range:	150 kHz to 2.4 GHz
Input impedance:	50Ω
Input VSWR:	<1.5:1 150 kHz to 1 GHz <3.0:1 1 GHz to 2.4 GHz
Tuning:	Automatic or Manual
Lock Time:	750ms
Sensitivity AUTO:	14 mV rms (-24 dBm), 250 kHz to <1 GHz 44 mV rms (-14 dBm), 1 GHz to <2 GHz 142 mV rms (-4 dBm), 2 GHz to 2.4 GHz

Sensitivity
MANUAL:

7 mV rms (-30 dBm)
<150 kHz to <1 GHz
22 mV rms (-20 dBm),
1 GHz to <2 GHz
71 mV rms (-10 dBm)
<2 GHz to 2.4 GHz

AMPLITUDE MODULATION

Level:	0 to 99% (useable overrange to 105%)
Modulation rates:	10 Hz to 75 kHz for carriers 6 MHz to 2.4 GHz 10 Hz to 15 kHz for carriers 150 kHz to 6 MHz
Resolution:	0.3% of reading +0.01% AM Full four digits, with digital averaging
Accuracy:	$\pm 1\%$ of reading $\pm 0.01\%$ AM
AM Distortion:	$<0.3\%$, 1 kHz rate up to 80% depth

FREQUENCY MODULATION

Max Deviation:	±500 kHz peak, carriers 6 MHz to 2.4 GHz
Modulation Rates:	DC/10 Hz to 300 kHz, carriers 6 MHz to 2.4 GHz DC/10 Hz to 15 kHz, carriers 150 kHz to 6 MHz
Resolution:	0.3% or reading +1 Hz full four digits
Accuracy:	±1% of reading ±1 Hz at 1 kHz rate
FM distortion:	<0.1% for deviations up to 100 kHz and rates up to 15 kHz

Meters

LCR Meter

WK 7330

NSN: 7Z6625-01-408-4889

Manufacturer:	Wayne Kerr, Inc.
Contract No.:	N00104-99-D-X005
SCAT:	4457
Expiration Date:	3/8/04
Price:	\$3,247

Product Features

The WK 7330 Automatic LCR Meter is a low-cost instrument that addresses the basic requirement for incoming inspection test of R, L, C, DF (dissipation factor), and Q (quality factor). Three test frequencies are standard and guarantee a basic accuracy of 0.1% over a wide range of LCR measurements. The WK 7330 features a binning capability that prompts the operator to direct the component into one of nine bins established by set bin limits. The bin settings are stored in nonvolatile memory and are saved when power is turned off.



Key Specifications and Characteristics

MEASUREMENTS

Function: L, C, R, D, Q; % or ABS deviation
Frequencies: 120 Hz, 1 kHz, 10 kHz $\pm 0.01\%$
Level: 250 mV ± 15 mV from
100 Ω source

GENERAL

Display: Five full digit LED display plus individual LED indicators
Connections: Four terminal built-in radial/axial fixtures
Auto Functions:
 AutoRange
 Series/Parallel
 Auto Component
Trimming: Auto open and short-circuit compensation

ACCURACY

Resistance ($Q < 0.1$):
 120 Hz (500 k Ω range): 0.1% ± 1 m Ω
 1/10 kHz (1 M Ω range): 0.1% ± 1 m Ω
 Resolution: 0.1 m Ω
 Maximum Display: 999 M Ω
Capacitance ($Q < 0.1$):
 120 Hz (1600 μ F range): 0.1% ± 2 pF
 1 kHz (160 μ F range): 0.1% ± 0.1 pF
 10 kHz (16 μ F range): 0.1% ± 0.01 pF
 Resolution: 0.001 pF
 Maximum Display: 990 mF

Inductance:
 120 Hz (800 H range): 0.1% ± 1 μ H
 1 kHz (160 H range): 0.1% ± 0.1 μ H
 10 kHz (16 H range): 0.1% ± 0.01 μ H
 Resolution: 0.001 nH
 Maximum Display: 9900 H
DF (Dissipation Factor):
 120 Hz (3.2 nF - 1.6 mF range): $\pm 0.001(1 + D^2)$
 1 kHz (160 pF - 160 μ F range): $\pm 0.001(1 + D^2)$
 10 kHz (16 pF - 1.6 μ F range): $\pm 0.001(1 + D^2)$
 Resolution: 0.0001
 Maximum Display: 9900
Q (Quality Factor):
 120 Hz (800 H range): $\pm 0.1(Q + 1/Q)\%$
 1 kHz (160 H range): $\pm 0.1(Q + 1/Q)\%$
 10 kHz (1.6 H range): $\pm 0.1(Q + 1/Q)\%$
 Resolution: 0.0001
 Maximum Display: 9900

Meters

Manufacturer: Keithley
Contract No.: N00104-99-D-X008
SCAT: 4209
Expiration Date: 4/22/04
Price: \$4,039

Digital Multimeter 2001-M

NSN: 7Z6625-01-425-9735

Product Features

The Keithley Model 2001-M Digital Multimeter in-circuit current measurement function offers a convenient accurate alternative to traditional current measurement techniques that's suitable for a wide array of applications.



Key Specifications and Characteristics

DC VOLTS

RANGE	RESOLUTION	INPUT RESISTANCE	ACCURACY (24 Hours)
200 mV	10 uV	>10 GΩ	10+6
2 V	100 uV	>10 GΩ	7+2
20 V	1 mV	>10 GΩ	7+4
200 V	10 mV	10 MΩ ±1%	13+3
1000 V	100 mV	10 MΩ ±1%	17+6

AC VOLTS ACCURACY

RANGE	20-50Hz	50 - 100Hz	0.1 - 2kHz	2-10kHz	10-30kHz
200mV	0.25+0.015	0.07+0.015	0.03+0.015	0.03+0.015	0.035+0.015
2V	0.25+0.015	0.07+0.015	0.03+0.015	0.03+0.015	0.035+0.015
20V	0.25+0.015	0.07+0.015	0.04+0.015	0.06+0.015	0.08+0.015
200V	0.25+0.015	0.07+0.015	0.04+0.015	0.06+0.015	0.08+0.015
750V	0.25+0.015	0.1+0.015	0.08+0.015	0.09+0.015	0.12+0.015

RANGE	30-50kHz	50 - 100kHz	100-200kHz	0.2-1MHz	1-2MHz
200mV	0.05+0.015	0.17+0.015	0.5+0.025	2+0.1	5+0.2
2V	0.05+0.015	0.17+0.015	0.5+0.025	2+0.1	5+0.2
20V	0.1+0.015	0.17+0.015	0.5+0.025	4+0.2	7+0.2
200V	0.1+0.015	0.17+0.015	0.5+0.025	4+0.2	
750V	0.15+0.015	0.5+0.015			

DC AMPS

RANGE	RESOLUTION	BURDEN	ACCURACY (24 Hrs)
200 uA	10 pA	0.25 V	63 + 25
2 mA	100pA	0.31 V	64 + 20
20 mA	1 nA	0.4V	65 + 20
200 mA	10 nA	0.5 V	96 + 20
2 A	100 nA	1.5 V	500 + 20

AC AMPS ACCURACY

RANGE	20-50Hz	50 - 200Hz	200Hz-1kHz	1-10kHz
200μA	0.35+0.015	0.2+0.015	0.4+0.015	0.5+0.015
2mA	0.3+0.015	0.15+0.015	0.12+0.015	0.12+0.015
20mA	0.2+0.015	0.15+0.015	0.12+0.015	0.12+0.015
200mA	0.3+0.015	0.15+0.015	0.12+0.015	0.15+0.015
2A	0.35+0.015	0.2+0.015	0.3+0.015	0.45+0.015

Oscilloscopes

Manufacturer: Hewlett Packard
Contract No.: N00104-98-D-X102
SCAT: 4314
Expiration Date: 1/29/03
Price: \$8,129

500 MHz 4 Channel Oscilloscope

HP 54825N

NSN: 7Z6625-01-451-8727

Product Features

The Hewlett Packard 54825A Infinium Oscilloscope combines a simple, analog-like front panel, graphical user interface, and a built-in information system to make high-performance measurements. A drag and drop feature is included that allows the user to measure waveforms using simple mouse driven operations. The built-in information system provides step-by-step instruction for 24 different measurements and procedures. In addition, a thorough index of help topics is available through a help menu. A high-resolution color display offers a waveform viewing area more than double that of many products in it's class.



Key Specifications and Characteristics

ACQUISITION

Max. Sample Rate, Real Time: 2 GSa/s on each channel
Max. Effective Sample Rate: 27
Rate, Equivalent Time: 100 GSa/s
Memory Depth: 32, 768 points/channel
Averaging: Selectable from 2 to 4096

VERTICAL

Number of Channels: 4 (simultaneous acquisition)
Analog Bandwidth (-3 dB): 500 MHz
Rise Time: 700 ps
Sensitivity:
1 M Ω : 1 mV/div to 5 V/div
50 Ω : 1 mV/div to 5 V/div
Input Impedance: 1 M Ω \pm 1% (\approx 8 pF),
or 50 Ω \pm 1%
Input Coupling: dc, ac (7 Hz, available in
1 M Ω only)
Max. Input Voltage:
1 M Ω : \pm 250 V (dc + ac) [ac
<10 kHz], CAT I
50 Ω : 5 V rms, CAT I
Channel-to-Channel
Isolation: dc to 50 MHz: 50 dB
50 MHz to 500 MHz: 40 dB

Offset Range:

Vertical Sensitivity	Available Offset
1 mV/div to 50 mV/div	\pm 2 V
>50 mV to 250 mV/div	\pm 10 V
>250 mV to 1.25 V/div	\pm 50 V

Dynamic Range: \pm 12 div from center screen
DC Gain Accuracy: \pm 1.25% of full scale at
full resolution channel scale

Resolution
Real Time: 8 bits (0.4% of full scale),
12 bits with averaging

HORIZONTAL

Main Time Base Range: 500 ps/div to 20 s/div
Delayed Sweep Range: 1 ps/div to current main time
base setting

Delayed Sweep Delay
Range: Within main time base
acquisition record

Resolution: 10 ps
Time Base Accuracy: 50 ppm (0.005%)

TRIGGER

Internal: dc to 100 MHz: 0.5 div
100 MHz to 500 MHz 1.0 div
External: dc to 100 MHz
0.0225 \times (signal range)
100 MHz to 500 MHz
0.045 \times (signal range)

Sweep Modes: Auto, Triggered, Single
Trigger Coupling: dc, ac (7 Hz), low frequency
reject (50 kHz), high-frequency
reject (50 kHz)

Oscilloscopes

TekScope™ Handheld Digital Oscilloscope

THS720A

NSN: 7Z6625-01-438-8024

Manufacturer:	Tektronix
Contract No.:	N00104-97-D-N007
SCAT:	4311
Expiration Date:	12/2/01
Price:	\$1,914



Product Features

The THS720A TekScope™ Handheld Digital Oscilloscope combines a full-featured digital real-time oscilloscope with a digital multimeter in a rugged, battery-operated instrument. Scope and meter modes can operate simultaneously and independently on the same or separate signals. The high-resolution, backlit display, and pop-up menus make it easy for users to take full advantage of the instrument's many features. The THS720A offers Isolated-Channel™ architecture for safety.

Key Specifications and Characteristics

OSCILLOSCOPE

Channels:	2
Bandwidth:	100 MHz
Sample Rate:	500 MS/s each channel
Time/Division Range:	5 ns to 5 s/div
Sensitivity:	5 mV to 50 V/div (to 500 V/div with 10x probe)
Position Range:	±10 div
DC Gain Accuracy:	±2%
Vertical Resolution:	8 bits
Record Length:	2,500 points
Horizontal Accuracy:	±200 ppm
Roll Mode:	≥0.5 s/div
Trigger Modes:	Auto, Normal
Trigger Types:	Edge, pulse, video, ext
Video Trigger Formats and Field Rates:	Triggers on Field 1, Field 2, or lines
Waveform Processing:	Add, Subtract, Multiply, Calculate $W = V \times I$
Waveform Storage:	10 waveforms
Acquisition Modes:	Sample, envelope, average, peak detect
Cursor Measurements:	ΔV , ΔTime , and $1/\Delta \text{Time}$
Cursor Types:	Horizontal bars, vertical bars, Paired (volts @ time)
Display System:	
Interpolation:	Sin(x)/x
Mode:	Vector, Dot, Vector Accumulate, Dot Accumulate
Format:	YT and XY

Automatic Measurements:

Period
+ and - width
+ and - duty cycle
High and low
p-p
Mean and cycle mean
Burst width
Frequency
Rise and fall time
+ and - overshoot
Maximum and minimum
Amplitude
rms and cycle rms

MULTIMETER

DC Voltage Ranges:	400 mV to 880 V
DC Volts Accuracy:	±(0.5% of reading + 5 counts)
True RMS AC Voltage Ranges:	400 mV to 640 V
Maximum Float Voltage:	600 V rms each channel
Resolution:	4,000 count, 3 1/2 digits
AC Volts Accuracy:	±(2% of reading + 5 counts)
Resistance Ranges:	400 Ω to 40 M Ω
Resistance Accuracy:	±(0.5% of reading + 2 counts)
Diode Test Range:	0 to 2 V
Continuity Check:	Audible tone when <50 Ω
Modes:	Min, Max, DMax-Min, avg, hold
Nonvolatile Storage:	10 DMM screenshots
Interface:	RS-232

Oscilloscopes

100 MHz Oscilloscope

HP 54645A-E01

NSN: 7Z6625-01-450-7534

Manufacturer:	Hewlett Packard
Contract No.:	N00104-98-D-X100
SCAT:	4308
Expiration Date:	12/5/02
Price:	\$1,924

Product Features

The Hewlett Packard 54645A is a 100 MHz dual channel oscilloscope that features 2 ns/div sweep speed, 200 MSa/s acquisition and a high speed display. It is designed to measure a full range of signals from high speed digital operation to slow speed analog transducer inputs. Very deep memory and 50 second/div sweep allows the user to capture transducer and analog signals at higher sampling speeds and longer timebase settings. With Hewlett Packard's MegaZoom® technology, the time/div and delay controls allow any part of the acquired waveform display to be expanded to the full extent of the memory available.



Key Specifications and Characteristics

VERTICAL SYSTEM, SCOPE CHANNELS 1 AND 2

Bandwidth (3 dB):	dc to 100 MHz @ ≥ 10 mv/div
ac coupled	1.5 Hz to 100 MHz
Rise Time (calculated):	~ 3.5 ns @ > 10 mv/div, (< 4.6 ns @ < 10 mv/div)
Dynamic Input Range:	± 32 V or ± 8 div whichever is less
Maximum Input:	400 V (dc + peak ac)
Range:	1 mV/div to 5 V/div
Accuracy:	$\pm 1.5\%$ FS
BW Limit:	Approximately 20 MHz
Coupling:	ac, dc, GND
AC Coupled:	1.5 Hz to 100 MHz

HORIZONTAL SYSTEM

Sweep Speeds:	50 s/div to 2 ns/div main and delayed
Accuracy:	$\pm 0.01\%$
Horizontal Resolution:	40 ps

CURSOR ACCURACY

Single Channel:	Horizontal accuracy $\pm 0.2\%$ of screen width ± 40 ps
Dual Channel:	Horizontal accuracy $\pm 0.2\%$ of screen width ± 80 ps

TRIGGER SYSTEM

Source:	Channel1, Channel 2, line external
Slope:	Rising or falling
Modes:	Auto, Autolevel, and Normal
Sensitivity	
DC to 25 MHz:	> 10 mV/div ≤ 0.35 div or 3.5 mV < 10 mV/div ≤ 1 div or 2 mV
25 MHz to	> 10 mV/div ≤ 1 div or 10 mV
100 MHz:	> 10 mV/div ≤ 1.5 div or 3 mV

EXTERNAL TRIGGER

Range:	± 18 V
Sensitivity:	dc to 100 MHz 100 mV
Coupling:	dc HF reject, and noise reject
Input resistance:	1 M Ω
Input	
Capacitance:	Approximately 13 pf
Maximum Input	
Voltage:	400V (dc + peak ac)
Sensitivity:	100 MHz to 100 mV

Electronic Counters

Pulse/CW Microwave Frequency Counter

HP 5361B-915

NSN: 7Z6625-01-429-4636

Manufacturer: Hewlett Packard
Contract No.: N00104-96-D-N013
SCAT: 4294
Expiration Date: 6/14/01
Price: \$5,676

Product Features

The HP 5361B-915 Pulse/CW Microwave Frequency Counter offers both high-precision pulse and CW performance. With built-in frequency modulation profiling, the HP 5361B characterizes radar, EW, and communications systems or components. The counter makes complex measurements for the carrier frequency of agile signals, staggered PRIs, or the frequency transients in a pulsed or CW signal. It can be used to characterize radar pulses or test a Stable Local Oscillator (STALO). Functions for measuring step response, posttuning drift, and settling time facilitate accurate and easy testing of VCOs and DTOs



Key Specifications and Characteristics

FREQUENCY (INPUT 1)

Automatic Acquisition: 500 MHz to 20 GHz for CW and pulses >100 ns

Least Significant Dlgit: 1 MHz to 1 Hz for frequency, 0.001 Hz for PRF

Pulse Frequency Measurements

Pulse Width (min): Manual mode, 60 ns; auto mode, 100 ns

Pulse Rep Frequency: Minimum 1 Hz, maximum 2 MHz

Measurement Time,

Resolution, Accuracy: See datasheet, CW Frequency Measurements

FM Tolerance: 55 MHz p-p

Tracking Speed

(fast acquisition):

Acquisition Time: 800 MHz/s
Manual mode, <40 ms;
automatic mode, fast acq., <100 ms

Gate Times

(1 Hz resolution): 200 to 800 ms

Measurement Time: Gate and acquisition time +100 ms

Accuracy: See datasheet

PROFILE (INPUT 1)

Frequency Range (min/max for Y axis): 500 MHz/20 GHz

FM Chirp Tolerance

(max span for Y axis): 10 MHz p-p

Time Range

(min/max span for X axis): 100 ns/10 ms

Time Resolution:

1 ns

Internal Gate Width:

Minimum: 11 ns to 23 ns; typical

Minimum: 14 ns

External Gate Width:

Minimum: Manual acquisition 20 ns; auto-acquisition 60 ns

Number of Data Points: Up to 100

Profile Frequency Measurements

Printers Supported: HP 2225A, HP 2227B, HP 3630A Opt 002

Profile Phase

Measurements:

See Application Note 377-4 for details. Computer required.

FREQUENCY (INPUT 2)

Range: 10 Hz to 525 MHz

Resolution/LSD: 1 Hz to 1 MHz

Time Base Aging: <1 × 10⁻⁷ per month

Electronic Counters

CW Microwave Frequency Counter

HP 5350B-001

NSN: 7Z6625-01-275-6268

Manufacturer:	Hewlett Packard
Contract No.:	N00104-97-D-N004
SCAT:	4294
Expiration Date:	11/21/99
Price:	\$2,942



Product Features

The HP 5350B-001 is an Automatic CW Microwave Frequency Counter that measures to 20 GHz. With resolution as fine as 1 Hz, this counter provides fast and precise frequency measurements. By integrating all microwave components onto a single hybrid GaAs circuit, this counter offers high performance at a low price. Exceptional sensitivity, fast tracking speed, high measurement throughput, and wide FM tolerance are a few of the high-performance features of this counter.

The built-in microprocessor offers math capabilities such as measurement scaling and offset.

Automatic amplitude discrimination automatically measures the frequency of the highest amplitude signal in a multisignal environment. The counter has built-in diagnostic routines that perform tests for general information and troubleshooting.

Key Specifications and Characteristics

INPUT 1

Frequency Range: 500 MHz to 20 GHz

Sensitivity:

500 MHz to 12.4 GHz: -32 dBm

12.4 GHz to 20 GHz: -27 dBm

Maximum Input: +7 dBm

Damage Level: +25 dBm

SWR (Typical):

500 MHz to 10 GHz: 2:1 typical

10 GHz to 20 GHz: 3:1 typical

Coupling:

DC: To 50 Ω termination

AC: To instrument

Accuracy: \pm LSD \pm timebase error \times frequency

Resolution: 1 Hz to 1 MHz, selectable

Tracking Speed:

Fast-acquisition Track: 1 GHz/s

Normal FM Rate: 1 MHz/s

Low FM Rate: 80 kHz/s

Modes:

Automatic: Counter automatically acquires highest level signal

Manual: Center frequency must be entered to within \pm 20 MHz

INPUT 2

Frequency Range: 10 Hz to 525 MHz

Sensitivity: 15 mV typical at 25°C

Maximum Input:

50 Ω : +10 dBm

1 M Ω : 1 V rms

Coupling: ac

Resolution: 1 Hz to 1 MHz, selectable

Time Base Output: 1 MHz and 10 MHz

Time Base Aging: $<5 \times 10^{-10}$ /day

External Time Base: 1, 2, 5, 10 MHz

GENERAL

Display: Segmented 24-character backlit LCD

Built-in Features:

Self check

Diagnostics

Display and keyboard lockout

Overload indicator

HP-IB teach-learn mode

Math Functions:

Scale

Offset

Smooth (exponential averaging)

Display Rate: 5/s

Electronic Counters

Manufacturer: Hewlett Packard
Contract No.: N00104-99-D-X001
SCAT: 4296
Expiration Date: 11/12/03
Price: \$1,149

ELECTRONIC COUNTER

53131A-010-030-H14

NSN: 7Z6625-01-399-2298

Product Features

The Hewlett Packard Model 53131 Universal Counter has a frequency resolution of 10 digits per second and a complete set of test and analysis features. This multi function counter gives the user the option of measuring frequency, frequency ratio, time interval, period, rise/fall time, positive/negative pulse width, duty cycle, phase, peak voltage, time interval average, and time interval delay. The unit provides up to 200 measurements per second at frequencies from DC to 225 MHz (channels 1 and 2) and up to 1.3 GHz in channel 3.



Key Specifications and Characteristics

CHANNEL 1 & 2 INPUTS

FREQUENCY RANGE

DC Coupled: 0.1 to 225 MHz
AC Coupled:
50 Ω : 1 MHz to 225 MHz
1 M Ω : 30 Hz to 225 MHz

VOLTAGE RANGE & SENSITIVITY

DC to 100 MHz: 20 mV rms to ± 5 Vac+dc
100 to 200 MHz: 30 mV rms to ± 5 Vac+dc
200 to 225 MHz: 40 mV rms to ± 5 Vac+dc
Trigger: Rising or falling edge
Level Set: % of signal or absolute voltage
Gating and Arming: Auto; settable (defined by gate time or digits of resolution required); external; delay

Timebase:
Temperature: $< 2.5 \times 10^{-9}$
Aging: 1.5×10^{-8} per month

MEASUREMENTS

Frequency:
Channel 1 and 2 Range: 0.1 Hz to 225 MHz
Channel 3 Range: 100 MHz to 1.3 GHz
Trigger: Defaults to 50% p-p signal
Period:
Channel 1 and 2 Range: 4.4 ns to 10 s
Channel 3 Range: 0.77 ns to 10 ns
Frequency Ratio:
Results Range: 10^{-10} to 10^{11}
Auto Gate Time: 100 ms

Peak Volts Channel 1 or 2

Input Signal: > 100 Hz and > 100 mV p-p or dc
Results Range: 100 mV p-p to ± 5.1 V
Resolution: 10 mV
Accuracy: 20 mV + 10% of V peak

ADDITIONAL MEASUREMENTS

Time Interval 1 to 2: -1 ns to 10^{-5} s
LSD: 500 ps
Pulse Measurements:
Pulse Width CH1: 5 ns to 10^5 s
Rise/Fall Time CH1: 5 ns to 10^5 s
Phase 1 to 2 Range: -180° to $+360^\circ$
Duty Cycle 1 Range: 0 to 1
Totalize 1:
Results Range: 0 to 10^{15}
Resolution: ± 1 count
Analysis: Limit testing, math (scaling and offset), statistics (min, max, mean, standard deviation)

Fiber Optic Test Equipment

Mini Optical Time Domain Reflectometer

MW9070NV

NSN: 7Z6625-01-388-4989

Manufacturer:	Anritsu
Contract No.:	N00104-98-D-X106
SCAT:	4318
Expiration Date:	5/21/03
Price:	\$3,689

Product Features

The MW9070B is a high-performance mini OTDR for installation and maintenance of subscriber fiber optic lines and other fiber optic cables. It automatically detects the positions of faults in the cable, and displays an event table listing faults and a trace waveform. The MW9070B is designed with a wide dynamic range and short dead zone, and is indispensable for detecting faults in optical trunk lines, subscriber lines, optical CATV cables, optical LANs, and other types of fiber optic cables. In addition, it is also invaluable in measuring transmission line losses, connection losses, return loss and other parameters.



Key Specifications and Characteristics

MAIN FRAME

Display:	640 × 480 dot semitransparent LCD, 7 in. (with backlight on/off function)
Interface:	Serial: RS-232C, 1 port (D-sub 9P connector) Printer: 8 bit parallel (Centronics, D-sub 25P connector) Keyboard: For IBM
Waveform Storage:	Internal memory (battery backup)

IOR:	1.400000 to 1.699999 (in 0.000001 steps)
Title Input:	32 characters maximum
Power Supply:	Battery: MZ5018A battery pack DC Input: 10 to 18 V/14 W AC Input: 90 to 250 V, 50/60 Hz
Dimensions and Mass:	194 mm H × 290 mm W × 75 mm D, <3.2 kg

AUTO MEASUREMENTS

Measurement Items:	Event distance, loss, return loss, loss from near end, and total return loss
Threshold:	Connection Loss: 0.01 to 9 dB (in 0.01 dB steps) Return Loss: 20 to 60 dB (in 1 dB steps) Fiber End: 1 to 10 dB (in 1 dB steps)
Number of Detection:	99 maximum
Automatic Setting Items:	Pulse width, distance range, averaging items

OPTICAL UNIT

Center Wavelength:	850 ± 30 nm (typical: ± 15 nm)
Fiber:	62.5/125 μm multimode
Optical Connector:	ST
Distance Range (km):	5, 10, 25, 50, 100, 200
Pulse Width (ns):	20, 50, 100
Dynamic Range (S/N = 1):	18 dB
Measurement Range:	10 dB
Accuracy:	Distance measurements: ± 2 m ± (10 ⁻⁴ × distance) Loss measurements (linearity): ± 0.05 dB/dB or 0.1 dB Return loss measurements: ± 4 dB
Measurement Time:	180 s maximum
Real-time Sweep:	1.0 s

MANUAL MEASUREMENTS

Real-time sweeping, point-to-point distance/loss measurements, point-to-point loss measurements per unit length, return loss measurements, splice/connection loss measurements, and total return loss

Distance Unit:	m, km, ft, kft, miles
Relative Distance Measurement:	Zero cursor settable


Fiber Optic Test Equipment

Optical Time Domain Reflectometer

MTS 5200

NSN: 7Z6625-01-455-3364

Manufacturer:	Wavetek Wandel & Goltermann
Contract No.:	N00104-98-D-X107
SCAT:	4310
Expiration Date:	4/29/03
Price:	\$9,309

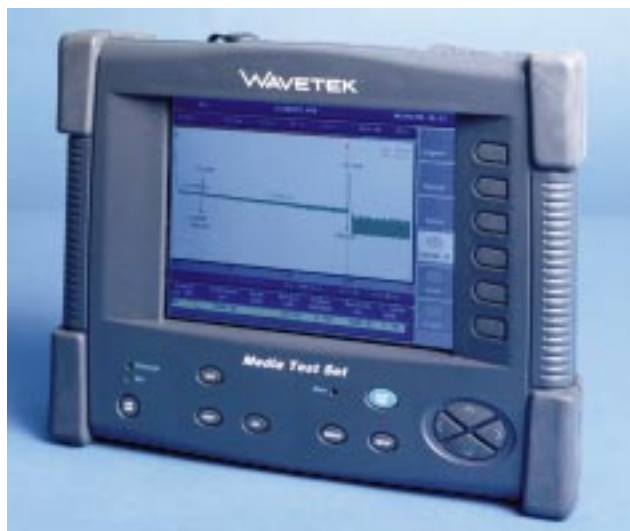

Product Features

The multimode (850/1300) MTS 5200 is the smallest Optical Time Domain Reflectometer (OTDR) in the world. It provides a full range of optical measurements including total loss, cumulative loss, section loss, reflectance, events, and optical-return loss. Information is displayed on an 8-inch VGA LCD screen and can be stored on an internal hard drive and/or 3.5 inch floppy drive. A built-in printer and IEEE interface is also included in the MTS 5200. Input power is 100-250 Vac or internally charged NiMH battery.

Key Specifications and Characteristics

TECHNICAL SPECIFICATIONS

Display:	Size: 8.4 in. Type: Color LCD Resolution: 640 × 480
Distance Units:	km, kft
Group Index Range:	1.30000 to 1.70000 in 0.00001 steps
No. of Data Points:	Up to 32,000 data points
Distance:	
Measurements:	Dual cursor
Cursor Resolution:	4 cm maximum
Accuracy:	±1 m
Attenuation:	
Measurements:	Dual cursor
Cursor Resolution:	0.01 dB
Accuracy:	±0.05 dB/dB
Reflectance Measurements	
Accuracy:	±4 dB
Storage:	
Internal Memory:	200 traces typical in internal memory
Floppy Disk Drive:	3.5 in., MS DOS compatible
Hard Disk:	1 GB
Input/Output:	RS232C, IEEE-488, Centronics, internal printer (option), external VGA (option)

Power Supply:

AC/DC Adapter: 100 V to 250 V, 1.6 A, 50 Hz to 60 Hz
± 10%, 400 Hz ± 10%

Battery Type: Internal removeable NiMH batteries

Weight: 6.5 kg (14.3 lb) including internal printer, 2 modules and 2 batteries

Size: 300 mm × 235 mm × 130 mm/
12 in. × 9.25 in. × 5.1 in.

Humidity: 95% noncondensing

OTDR MODULES

	<u>5021-NV</u>	<u>5022-NV</u>
Central Wavelength:	850 ± 30 nm	1300 ± 25 nm
Laser Safety:	Class 1	Class 1
Fiber:	62.5/125 μm	multimode
Pulsewidth:	3 ns to 100 ns	3 ns to 300 ns
Range:	Up to 40 km	Up to 80 km
RMS Dynamic Range:	24 dB	20 dB
Event Dead Zone:	1 m	1 m
Attenuation Dead Zone:	6 m	17 m

Fiber Optic Test Equipment

Fiber Optical Leak Detector

PX-D603

NSN: 7Z6030-01-414-8582

Manufacturer:	Photonix Technologies
Contract No.:	N00104-97-D-X208
SCAT:	4319
Expiration Date:	8/5/2002
Price:	\$874

Product Features

The flash detector series of optical leak detection sets is designed to locate energy leaks in fiber-optic systems due to splice loss, connector loss, breakage, or bending. By simply scanning over a fiber, the leak detection probe will beep whenever it encounters a light-loss point. Detecting signals as low as -65dBm, the probe is more sensitive than visible laser sources due to its use of IR energy rather than red light. The probe is powered by a 1/2 AA lithium cell and has a typical run time over 100 hours.

The stabilized light source is suitable for use as both a tracer signal generator (for leak detection) and a full-featured light reference (for use in loss testing applications). The sources are powered by AA alkaline batteries and ac wall pack as well as the included AA NiCd cells. In addition, the source includes a built-in 1-hour quick charger for emergency situations.



Key Specifications and Characteristics

Detector:	Filtered Ge
Wavelength:	1300 nm \pm 30 nm
View Angle:	20°
Sensitivity:	-60 dBm minimum (-65 dBm typ)
Probe Mod:	500 Hz
Source Emitter:	LASER
Source Power:	-3 dBm minimum (adjustable to < -13 dBm)
Operating Temperature:	-5°C to 50°C
Storage Temp:	-10°C to 60°C
Humidity:	10% to 90% noncondensing
Power:	US 120/240 Vac 60 Hz (included) NiCd 4 AA 600 mAH (included) Alkaline 4 AA Probe 1/2 AA Lithium
Battery Life:	10 h source, 100 h probe
Trickle Charge:	12 h to 14 h (source only)
Quick Charge:	60 minutes (source only)

Fiber Optic Test Equipment

Optical Loss Test Set

OMK-10/N

NSN: 7Z6650-01-442-5441

Manufacturer: Wavetek Wandel & Goltermann
Contract No.: N00104-97-D-X200
SCAT: 4954
Expiration Date: 4/2/02
Price: \$1,360



Product Features

The OMK-10/N Optical Loss Test Set (OLTS) is ideal for making power and loss measurements during installation, maintenance, and repair of fiber-optic networks. The test set provides audible fiber identification and has the capability of storing up to 150 measurement results. The units are housed in a rugged casing and include a universal interchangeable adapter system. The units calibration is traceable to national standards.

Key Specifications and Characteristics

OPTICAL POWER LEVEL METER

Wavelength Range:	800 nm to 1700 nm
Photodiode:	Germanium
Fiber Type:	9/125 μ m to 100/140 μ m
Standard Wavelengths:	820 nm, 850 nm, 1300 nm, 1310 nm, and 1550 nm
Display Range:	-70 dBm to +11 dBm
Maximum Input Level:	+13 dBm
Intrinsic Error:	± 0.13 dB (corresponds to $\pm 3\%$)
Measurement uncertainty:	
For the Level Range:	-60 dBm to 0 dBm
850 nm:	± 0.03 dB ± 1.6 nW
1300 nm, 1310 nm:	± 0.25 dB ± 0.4 nW
1550 nm:	± 0.70 dB ± 0.4 nW
Display:	
Modulation Detection:	270, 300, 1000, 2000 Hz
Result Display:	LCD, 4 digit
Presentation:	dBm, dB, mW, μ W
Resolution:	0.01 dB/0.001 μ W
Auto Turn-off:	20 minutes
Operating Time:	
Dry Batteries:	36 h
Rechargeable Batteries:	12 h
Optical Connection:	ST

OPTICAL LED SOURCE

Type:	Infrared LED
Wavelength Range:	1310 nm ± 50 nm
Spectral Bandwidth:	150 nm typical
Output Power:	
50/125 μ m Fiber:	-20 dBm
62.5/125 μ m Fiber:	-15 dBm
85/125 μ m Fiber:	-13 dBm
100/140 μ m Fiber:	-11 dBm
9/125 μ m Fiber:	-38 dBm
Output Accuracy:	± 2 dB
Power Stability:	
Short Term (15 minutes):	± 0.003 dB
Long Term (6 h):	± 0.1 dB
Auto Turn-off:	20 minutes
Operating Time:	Same as meter
Optical Connection:	ST
Operating Temp. Range:	-10° to +55°C

Network Test Instrumentation

Manufacturer: Wavetek Wandel & Goltermann
Contract No.: N00104-97-D-X212
SCAT: 4465
Expiration Date: 10/9/02
Price: \$2,550

Lan CableMeter LT8155A

NSN: 7Z6625-01-449-3658

Product Features

The LT8155A is designed to allow the user to certify and troubleshoot LAN installations. The autotest mode completes line map, dc loop resistance, length, capacitance, Dual NEXT™ power sum NEXT, ELFEXT, Power Sum ELFEXT, attenuation, Attenuation-to-Crosstalk Ratios (ACR), and return loss. The unit is user selectable for TIA or ISO autotest suites and automatically performs all required testing. The 155 MHz LT8155A stores up to 1500 autotests and can print or upload the test results for future use. Accuracy of the LT8155A meets TSB-67 Level IIE standards for basic and channel links.



Key Specifications and Characteristics

CABLE TYPES:

UTP/STP/FTP
CAT 3,5,5E; ISO Class C, D
Coax: 10BASE2,10BASE5
IBM STP Type 1,2,6

LINE MAP

8-wire pin connectivity, cable destination and shield continuity

DC RESISTANCE

Range: 0 to 400 Ω autoranging
Accuracy: $\pm(1\% + 2 \Omega)$
Resolution: 0.1 Ω

LENGTH

Range: 0 to 1100 ft (0 m to 335 m)
Accuracy: $\pm(3\% + 3 \text{ ft} + \text{NVP uncertainty})$
Resolution: 1 ft (0.3m)
Propagation Rate: 0.5-0.99c ± 0.01

DELAY

Range: 0 to 4000 ns
Accuracy: $\pm(3\% + 1 \text{ ns})$
Resolution: 1 ns

AVERAGE IMPEDANCE (ZO)

Range: 35 to 180 Ω
Accuracy: $\pm(3\% + 1 \Omega)$
Resolution: 0.1 Ω

CAPACITANCE

Range: 0 pF to 100 nF
Accuracy: $\pm(2\% + 20\text{pF})$
Resolution: 1 pF minimum

ATTENUATION

Swept Frequency Range: 1 MHz to 155 MHz
Full Range: 70 dB
Frequency Steps: 150 kHz, 250kHz
Accuracy: $\pm 0.6 \text{ dB}$ at CAT 5/Class D
Resolution: 0.1 dB

NEAR END CROSSTALK

Swept Frequency Range: 1 MHz to 155 MHz
Full Range: 70 dB
Frequency Steps: 150 kHz, 250 kHz
Accuracy: $\pm 1.6 \text{ dB}$ at CAT 5/Class D
Resolution: 0.1 dB

RETURN LOSS

Swept Frequency Range: 1 MHz to 155 MHz
Frequency Steps: 150 kHz, 250 kHz
Range: 0 - 30 dB
Accuracy: $\pm 2 \text{ dB}$ at Class D
Resolution: 0.1 dB
Display: 160 \times 160 backlight graphical LCD

Network Test Instrumentation

LANMeter

686/AN

NSN: 7Z6625-01-456-1561

Manufacturer:	Fluke
Contract No.:	N00104-96-D-N015
SCAT:	4567
Expiration Date:	7/2/01
Price:	\$10,148



Product Features

The Enterprise LANMeter Model 686/AN is a lightweight, portable meter designed for troubleshooting and analyzing network equipment and connections in 10 Mbps ethernet, 100 Mbps fast ethernet and 4/16 Mbps token-ring environments. SwitchWizard software provides the LANMeter with the capability to support switched networks. The LANMeter includes WideAreaWizard software and supports the SNMP protocol for enterprise network analysis. Multiple cable types can be easily tested, which include an autotest mode, against the selected test standards. The unit operates on removable/rechargeable NiCad batteries.

Key Specifications and Characteristics

PHYSICAL

Dimensions (H×W×D):	29.2 cm × 17.8 cm × 6.7 cm (11.5 in. × 7.0 in. × 2.65 in.)
Weight:	2 kg (4.5 lb)
Keyboard:	36-key Elastomeric with alphanumeric and dedicated keys
Display:	240 × 128 pixel bitmapped LCD. (H × W) 12 cm × 6.5 cm (4.75 in. × 2.5 in.)
Power:	Removable/Rechargeable NiCad
Communication Ports:	RS-232C serial port (DB-9)
Network Ports:	
Ethernet:	HUB connector (RJ-45) NIC connector (RJ-45) BNC (ThinLAN)
Token Ring:	MAU connector (RJ-45 and DB-9) NIC connector (RJ-45 and DB-9)

TDR SPECIFICATIONS

Resolution:	0.3 m (1 ft)
Minimum Distance:	0 m (0 ft) measures right up to connection point
Maximum Distance:	Dependent on cable type

MEASUREMENT ACCURACY

DC Resistance (BNC connector):	±10% (0 Ω to 200 Ω)
Cable Length:	0 m to 30 m (0 ft to 100 ft): ±(1% of reading +0.3 m (1 ft)) 30 m to 300 m (100 ft to 1,000 ft): ±2% of reading

SUPPORT NETWORKS

10 Mbps ethernet/100 fast ethernet (auto sensing)
4/16 Mbps token ring

CABLE TEST FUNCTIONS

Cable Types:	Unshielded twisted pair LAN cables of all categories (100 Ω UTP category 3, 4, and 5) Foil-screened twisted pair cables (100 ScTP, category 3, 4, and 5) Shielded twisted pair cables (150, IBM Type 1, 6, and 9) Coaxial cables: ThickLAN (10BASE5), ThinLAN (10BASE2), RG-58
--------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

INFORMATION STORAGE

Test results may be saved internally to the unit or uploaded to a PC.

Network Test Instrumentation

Manufacturer:	Wavetek Wandel & Goltermann
Contract No.:	N00104-98-D-X103
SCAT:	4160/4161
Expiration Date:	2/10/03
Price:	\$8,776 \$13,185

LAN Protocol Analyzers

Ethernet/Token Ring 9314/51

NSN: 7Z6625-01-428-9169

Ethernet/Token Ring/FDDI 9314/52

NSN: 7Z6625-01-428-9173

Product Features

The 9314/51 and 9314/52 configurations are easy-to-use, flexible, and portable LAN Protocol Analyzers for monitoring, troubleshooting, and simulation in LAN Ethernet/Token Ring and FDDI environments. The 9314/51 Ethernet/Token Ring unit is delivered with a lightweight soft pack. The 9314/52 is configured in a rugged, aluminum case and is delivered with a lightweight soft pack for accessories storage. The analyzers' functionalities can be expanded by adding any of the 9314/xx and 9316/xx models. Each configuration is delivered with Mentor software, the interactive expert analysis system. The Mentor system is a powerful, efficient, and easy-to-use diagnostic tool that quickly identifies and helps to solve network problems.



Key Specifications and Characteristics

9314/51

Ethernet and Token Ring network interfaces
Real-time analysis
Real-time hardware filtering
Decodes and displays all major protocols in ASCII, hexadecimal, or plain English
Remote operation via PC anywhere

9314/52

Ethernet, Token Ring, and FDDI network interfaces
Simultaneous dual port real-time analysis
Real-time hardware filtering
Decodes and displays all major protocols in ASCII, hexadecimal, or plain English
FDDI SAS and DAS connections
SAS connection for copper cabling (CDDI)
Optical bypass switch connection for operation in dual ring topology
Remote operation via PC anywhere

DATA RATES

Ethernet:	10 Mbps
Token Ring:	4 or 16 Mbps
FDDI:	100 Mbps

INTERFACE CONNECTORS

Ethernet:	AUI (DB-15), 10BaseT (RJ-45), 10Base2 (BNC)
Token Ring:	DB-9, UTP (RJ-45)
FDDI:	MIC-AS, MIC-B
CDDI:	RJ-45/S

ANALYZER HARDWARE

25 MHz, 32-bit word RISC architecture
24 MB capture memory

CONTROLLER

IBM compatible with 166-MHz Pentium, 16 MB of RAM, removable hard drive, 3.5 in. floppy drive, CD ROM, 33.6 kHz modem, PCMCIA slots, and active matrix display

POWER REQUIREMENTS

100 to 240 Vac with provided external adapter (selectable)

TRAINING AND SOFTWARE UPGRADES

Two training sessions annually, one in East Coast and one in West Coast. Includes systems software upgrades.

Network Test Instrumentation

LAN/WAN Protocol Analyzers

LAN/WAN/Ethernet/Token Ring 9314/53

NSN: 7Z6625-01-428-9179

LAN/WAN/Ethernet/Token Ring/FDDI 9314/54

NSN: 7Z6625-01-428-9181

Manufacturer:	Wavetek Wandel & Goltermann
Contract No.:	N00104-98-D-X103
SCAT:	4162/4163
Expiration Date:	2/10/03
Price:	\$13,405 \$17,659



Product Features

The 9314/53 and 9314/54 configurations are easy-to-use, flexible, and portable Internetworking Protocol Analyzers for monitoring, troubleshooting, and simulation in LAN (Ethernet, Token Ring, FDDI) and WAN environments. Each analyzer is configured in a rugged, aluminum case for safe and secure transport and is delivered with a lightweight soft pack for accessories storage. The analyzers' functionalities can be expanded by adding any of the 9314/xx and 9316/xx models. Each configuration is delivered with Mentor software, the interactive expert analysis system. The Mentor system is a powerful, efficient, and easy-to-use diagnostic tool that quickly identifies and helps to solve network problems.

Key Specifications and Characteristics

9314/53

Ethernet, Token Ring, and WAN interfaces
Simultaneous dual port real-time analysis across LAN/WAN
Real-time hardware filtering
Decodes and displays all major protocols in ASCII, hexadecimal or plain English
Decodes encapsulated LAN protocols
Remote operation via PC anywhere

9314/54

Ethernet, Token Ring, FDDI, and WAN interfaces
Simultaneous dual port real-time analysis across LAN/WAN
Real time hardware filtering
Decodes and displays all major protocols in ASCII, hexadecimal or plain English
Decodes encapsulated LAN protocols
FDDI SAS and DAS connections
SAS connection for copper cabling (CDDI)
Optical bypass switch connection for operation in dual ring topology
Remote operation via PC anywhere

DATA RATES

Ethernet:	10 Mbps
Token Ring:	4 or 16 Mbps
FDDI:	100 Mbps
WAN:	2,048 kbps full duplex

INTERFACE CONNECTORS

Ethernet:	AUI (DB-15), 10BaseT (RJ-45), 10Base2 (BNC)
Token Ring:	DB-9, UTP (RJ-45)
FDDI:	MIC-AS, MIC-B
CDDI:	RJ-45/S
WAN:	RS232/V.24, V.35, V.11, RS449, RS530, RS422, BANTAM

ANALYZER HARDWARE

25 MHz, 32-bit word RISC architecture
24 MB capture memory

CONTROLLER

IBM compatible with 166 MHz Pentium, 16 MB of RAM, removable hard drive, 3.5 in. floppy drive, CD ROM, 33.6 kHz modem, PCMCIA slots, and active matrix display

POWER REQUIREMENTS

100 to 240 Vac with provided external adapter (selectable)

TRAINING AND SOFTWARE UPGRADES

Two training sessions annually, one in East Coast and one in West Coast. Includes system software upgrades.

Network Test Instrumentation

ATM, Fast Ethernet, and LAN/WAN Protocol Analyzers

Manufacturer: Wavetek Wandel & Goltermann
Contract No.: N00104-98-D-X103
SCAT: See right column
Expiration Date: 2/10/03
Price: See right column



Product Features

The 9316/xx are easy-to-use, flexible, and portable Internetwork Protocol Analyzer modules for monitoring, troubleshooting, and simulation in ATM and Fast Ethernet environments. The ATM and Fast Ethernet modules can be added to any of the Internetwork Protocol Analyzers 9314/xx to expand test capabilities. The ATM chassis 9316/90.11 is required to support an ATM interface. The 9314/01, 9314/02, and 9314/04 are optional modules, which can be added to expand test capabilities of Internetwork Protocol Analyzers. Their specifications and characteristics were described in 9314/53, 9314/51, and 9314/52, respectively. Mentor is an interactive expert analysis system which is a powerful, efficient, and easy-to-use diagnostic tool that quickly identifies and helps to solve network problems.

Key Specifications and Characteristics

ATM

Full SVC emulation and statistics
Automatic ILMI ATM address registration
QoS measurements
Dynamic capture filters based on ATM addresses
Multiport synchronized analysis
Call set-up and Report Wizards

FAST Ethernet

Real-time analysis of 100Base-T and 10Base-T networks
Full line rate capture, analysis, and transmit on full and half duplex
Multiport synchronized analysis
Decodes all major LAN and WAN protocols

DATA RATES

DS-1: 1.5 Mbps
E-1: 2 Mbps

ATM Chassis

NSN: 7Z6625-01-428-9184

ATM DS-1 SCAT 4164AAA

NSN: 7Z6625-01-428-9187

ATM DS-3 SCAT4164AAB

NSN: 7Z6625-01-428-9176

ATM OC-3 Multimode

SCAT 4164AAC

NSN: 7Z6625-01-428-9178

ATM OC-3 Single Mode

SCAT 4164AAD

NSN: 7Z6625-01-453-5041

ATM 155 Mbps UTP

SCAT 4164AAE

NSN: 7Z6625-01-453-5043

ATM E-1 SCAT 4164AAF

NSN: 7Z6625-01-455-6714

Fast Ethernet SCAT 4165

NSN: 7Z6625-01-455-0855

Ethernet/Token Ring

SCAT 4160AAA

NSN: 7Z6625-01-455-0846

FDDI SCAT 4161AAA

NSN: 7Z6625-01-455-0853

WAN SCAT 4162AAA

NSN: 7Z6625-01-455-0849

MENTOR SOFTWARE

NSN: **TBD**

9316/90.11

Price: \$4,323

9316/90.12

Price: \$4,135

9316/90.13

Price: \$4,216

9316/90.14

Price: \$3,906

9316/90.15

Price: \$6,966

9316/90.16

Price: \$3,994

9305/90.73

Price: \$6,155

9314/90.40

Price: \$13,768

9314/02

Price: \$7,186

9314/04

Price: \$9,380

9314/01

Price: \$7,186

9314/93.3

Price: \$1,866

DS-3: 44.7 Mbps
OC-3 MM/SM: 155 Mbps
UTP: 155 Mbps
Fast Ethernet: 10 Mbps, 100 Mbps

INTERFACE CONNECTORS

DS-1: BNC, RJ-45
DS-3: BNC
E-1: BNC
OC-3 MM: SC
OC-3 SM: ST
OC-3 UTP: RJ-45
Fast Ethernet: RJ-45, MII

TRAINING

Two training sessions annually, one in East Coast and one in West Coast

Specialized Test Equipment

Radio Test Set

2947

NSN: 7Z6625-01-432-6997

Manufacturer: IFR
Contract No.: N00104-96-D-N025
SCAT: 4345
Expiration Date: 6/24/01
Price: \$7,433

Product Features

The 2947 Radio Test Set communications service monitor was built to meet the requirements of the U.S. Navy and Federal Aviation Administration. It is the lightest, most rugged service monitor available with a full-performance spectrum analyzer.

The 2947 provides an excellent combination of instruments for all types of maintenance work, while providing exacting measurements for use in repair and calibration laboratories.



Key Specifications and Characteristics

FREQUENCY

Frequency Range: 400 kHz to 1.05 GHz
Resolution: 10 Hz or 1 Hz selectable

Frequency Range: As internal AM
Modulation Freq: As internal AM
Sensitivity: 1 V rms for 100% AM

OUTPUT LEVEL

Output Level Range:
N-Type Socket: -141 dBm to -21 dBm
BNC Socket: -115 dBm to +5 dBm
(overrange to +7 dBm)
Resolution: 0.1 dB
Accuracy: +2 dB for level above
-127 dBm on N-Type socket
up to 1 GHz

FREQUENCY MODULATION - INTERNAL
Frequency Range: 400 kHz to 1.05 GHz
Maximum Deviation: 75 kHz
Accuracy: $\pm 7\%$ at 1 kHz modulating
frequency
Modulation Frequency: 20 Hz to 25 kHz
Range Pre-emphasis: 750 μ s selectable

SPECTRAL PURITY

Residual FM: Less than 12 Hz rms
(0.3 kHz to 2.4 kHz)
Harmonics: Better than -25 dBc
Spurious Signals: Better than -50 dBc
SSB Phase Noise: Better than -108 dBc/Hz
(20 kHz offset) up to 1 GHz

FREQUENCY MODULATION - EXTERNAL
Input Impedance: Nominally 10 k Ω || 40 pF
Frequency Range: As internal FM
Modulation Frequency: dc to 100 kHz
Pre-emphasis: 750 μ s selectable
Sensitivity: 1 V rms for 0 kHz to 75 kHz
deviation

AMPLITUDE MODULATION - INTERNAL

Frequency Range: 400 kHz to 1.05 GHz
AM Depth Range: 0% to 99%
Accuracy: $\pm 5\% \pm 1$ digit for modulation
frequency of 1 kHz
Modulation Frequency: 20 Hz to 25 kHz

MICROPHONE INPUT Press To Talk (PTT)

When using the microphone in Tx Test mode, the PTT will switch instrument to Rx Test allowing the 2947 to operate in Transceiver Talk through mode.

IEEE 488-2 (GPIB) programming interface

AMPLITUDE MODULATION - EXTERNAL

Input Impedance: Nominally 10 k Ω || 40 pF

Specialized Test Equipment

Synthesized Oscillator

98

NSN: 7Z6625-01-369-7692



Product Features

The Model 98, Synthesized Oscillator is a ruggedized, low distortion synthesized sine wave oscillator with up to 30 Vp-p output amplitude. Frequencies from 1 μ Hz to 1.1 MHz are generated using direct digital synthesis with eight-digit resolution 30 ppm accuracy. An external 10 MHz reference can be used to synchronize the output to an external frequency standard for improved accuracy. The Model 98 also has versatile frequency sweep capability, including continuous sweep, triggered sweep, sweep-and-hold, and sweep up/down functions. The Model 98 combination of accurate performance, user-friendly front panel, and standard GPIB interface make this the ideal product for precision bench-top and ATE application.

Key Specifications and Characteristics

FREQUENCY

Range: 1 μ Hz - 1.1 MHz
Resolution: 8 digits limited by 1 μ Hz
Accuracy: $\pm(30 \text{ ppm} + 10 \text{ nHz})$

Amplitude (50 Ω Unbalanced Output)

Range: 15 mVp-p - 15 Vp-p (into 50 Ω)
Resolution: 4 digits
Accuracy: 1% of setting $\pm 1 \text{ mVp-p}$ (at 1 kHz)
Flatness: (Relative to 1 kHz)
<100 kHz: $\pm 0.3 \text{ dB}$
<1 MHz: $\pm 1.0 \text{ dB}$
<1.1 MHz: $\pm 1.5 \text{ dB}$

Amplitude (600 Ω Balanced Output)

Range: 30 mVp-p - 30 Vp-p (into 600 Ω)
Resolution: 4 digits
Accuracy: 5% of setting $\pm 5 \text{ mVp-p}$ (at 1 kHz)
Flatness: (Relative to 1 kHz)
<100 kHz: $\pm 1.0 \text{ dB}$
<200 kHz: +1, -4 dB

Sine Wave Purity

<20 kHz Harmonics <-65 dBc (typ. 0.02%)
<200 kHz: Harmonics <-55 dBc
<1.1 MHz: Harmonics <-46 dBc

Manufacturer:	Wavetek Wandel & Goltermann
Contract No.:	N00104-98-D-X111
SCAT:	4358
Expiration Date:	6/26/03
Price:	\$3,017

SWEEP

Sweep Modes

Continuous sweep, continuous sweep with reverse, triggered sweep, triggered sweep with reverse, triggered sweep and hold, triggered sweep and hold with reverse, manual sweep.

Start/Stop Frequency

Range: 1 Hz to 1.1 MHz in one range.
Resolution: 5 digits

Sweep Time

Range: 30 ms to 1000sec
Resolution: 1 ms
Accuracy: 0.1% $\pm 1 \text{ ms}$

Specialized Test Equipment

Pressure Calibrator System

3666-10K-2

NSN: 7Z6695-01-387-4127

Manufacturer:	King Nutronics
Contract No.:	N00104-95-D-LA23
SCAT:	5088
Expiration Date:	6/19/00
Price:	\$34,971

Product Features

The 3666-10K-2 Automatic Pressure Calibration (APC) System is a portable, secondary standards laboratory, using microprocessor circuitry capable of generating and controlling test/calibration pressures up to 10,000 psig with an accuracy of $\pm 0.1\%$ IV. The APC is designed to test and calibrate pressure gauges, switches, transmitters, transducers, and other pressure sensing devices with a minimum of operator effort.

The APC is a direct reading, precision standard providing indications in psig, inches-of-mercury, millimeters-of-mercury, inches-of-water, feet-of-seawater, kilopascals, and kilograms-per-square-centimeter. Pressure, vacuum, absolute, or compound gauge switches, and other pressure sensing devices can be tested/calibrated. A remote control terminal is provided allowing testing/calibration of pressure instruments in their normal locations.



Key Specifications and Characteristics

CONTROL UNIT

Range: 25 in. Hg Vac, 0 to 10,000 psig
Accuracy:
0 to 5 psig: 0.005 psig max error
5 to 10 psig: 0.1% IV
Vacuum: greater of 0.2% IV or ± 0.02 in. Hg
Absolute: 0.1% IV (above 10 in. Hg absolute)
Resolution:
Below 100 psig: 0.001 psig
100 to 1k psig: 0.01 psig
1k to 10k psig: 0.1 psig
Display: Alphanumeric vacuum fluorescent
Readout Units: Psig, in. Hg, mm Hg, in. H₂O, ft H₂O, ft sea (sea water), KPa, kg sq.cm.

PRESSURE INTENSIFIER

Type: Electric motor driven
Discharge Pressure: 1,000 psig to 10,000 psig
Min Supply Pressure: 500 psig

NITROGEN SUPPLY CYLINDER ASSEMBLY

Type: ICC-3AA
Operating Pressure: 2216 psig

Capacity: 60 scf @ 2216 psig
Dimensions: 7.25 in. \times 28 in.

ACCESSORY KIT

High-Pressure Hoses (2 each):

Length: 10 ft
Pressure:
Operating: 10,000 psig
Proof: 15,000 psig
Burst: 40,000 psig

Supply Hose:

Length: 5 ft
Pressure:
Operating: 3,000 psig
Proof: 4,500 psig
Burst: 12,000 psig

Fluid Separator Assemblies:

Pressure:
Operating: 10,000 psig
Proof: 15,000 psig
Burst: 45,000 psig
Capacity: 3.0 cu in.
Diaphragm: Buna-N
Maximum Error: 0.01 psig

Specialized Test Equipment

Test Set, Analog Signature

HUNTRON 5100DS/99-0315

NSN: 7Z6625-01-325-3672

Manufacturer:	Huntron Instruments
Contract No.:	N00104-98-D-X101
SCAT:	4554
Expiration Date:	12/29/02
Price:	\$8,063



Product Features

The Huntron® Tracker® 5100DS can be used to quickly and easily troubleshoot boards with analog, digital, or mixed signal components. Technology as simple as diodes or as complex as surface mounted VLSI devices can be analyzed providing a flexible and economical approach to testing.

Data can be stored for future applications or shared with other Tracker equipped technicians making the unit extremely efficient. The powerful PC-based software that comes with the Tracker

makes the job of “learning” and testing device signatures quick and easy. The menu driven software is simple to use and does not require programming. The wide variety of applications that the Tracker can be applied to makes this a valuable troubleshooting tool.

Key Specifications and Characteristics

SPECIFICATIONS

Test Frequency: 200 Hz
Line Voltage: 100 Vac, 110 Vac, 115 Vac or 230 Vac
Power: 32 W maximum
Display: 2.8 in. (7.0 cm) diagonal CRT
Test connectors: 64, 40, and 20 pin IDC connectors
(for DIP clip cables), 40 pin ZIF socket
(for individual component testing)
GPIB interface: IEEE-488
Operating Temp: +59°F to +86°F (+15°C to +30°C)
Storage Temp: -50°C to +60°C (-58°F to +140°F)

RANGES

Ranges:	Range	V_S (Vpk)	Z_S (k Ω)	I_{sc} (mA rms)	P_{max} (mW)	P_{diode} (mW)
	High	60	74	0.6	6	0.2
	Medium 2	20	27	0.6	2	0.2
	Medium 1	15	1.2	8.5	23	2
	Low	10	54 Ω	132	232	33

Specialized Test Equipment

Test Set, Semiconductor

2000B, 2000B-HSR410

NSN: 7Z6625-01-391-4404

NSN: 7Z6625-01-399-2299

Manufacturer: Huntron Instruments
Contract No.: N00104-97-D-X205
SCAT: 4553, 4553-ANC
Expiration Date: 6/18/02
Price: \$1,137 \$1,737

Product Features

The Huntron®Tracker 2000B provides advanced troubleshooting capabilities to simplify testing newer technology components such as CMOS and MOS circuits. It's built-in pulse generator lets you thoroughly troubleshoot gate-fired devices such as SCRs, TRIACs, and optocouplers. By energizing the gate, you can test a component in an active mode. The 2000B allows the user to analyze the overall health of a solid-state component, which makes it perfect for finding leakage or substrate damage that has brought a system or PCB down prematurely. Because it can compare suspect components to known good equivalents, it is also ideal for troubleshooting when documentation is missing or incomplete.



Key Specifications and Characteristics

SPECIFICATIONS

Test Frequencies: 50/60 Hz, 200 Hz, 2000 Hz
Functions
Range Selection: Auto or Manual, High Range Lockout

Compare-A-Trace
Adjustable: (0.5 Hz to 10 Hz)
Pulse Generator:
Level: 0-5 V
DC Mode: +dc or -dc
Pulse Mode: +Pulse, -Pulse, or both;
adjustable duty cycle
Line Voltage: 100 Vac, 115 Vac or 230 Vac
Power: 20 Watts maximum
Display: 2.8 in. (7.0 cm) diagonal CRT
Dimensions: 11 in. L x 9 in. W x 4 in. H
Weight: 6.5 lb (3.0 kg)
Operating Temp: +32°F to +122°F (0°C to +50°C)
Storage Temp: -50°C to +60°C (-58°F to +140°F)

RANGES

Range	V_s (Vpk)	Z_s (K Ω)	I_{sc} (mA rms)	P_{max} (mW)	P_{diode} (mW)
High	60	74	0.6	6	0.2
Medium 2	20	27	0.6	2	0.2
Medium 1	15	1.2	8.5	23	2
Low	10	54 Ω	132	232	33

Specialized Test Equipment

Test Set, Radio Frequency

4410A500

NSN: 7Z6625-01-443-9916

Manufacturer:	Bird Electronics
Contract No.:	N00104-97-D-X204
SCAT:	4958
Expiration Date:	5/15/02
Price:	\$1,541

Product Features

The model 4410A500 is a Radio Frequency Test Set designed to make RF output power measurements, load-match measurements, power-to-load calculations, transmission-line loss measurements, and sample-transmission line power. The unit covers the 20 MHz to 1000 MHz range and can measure signals up to 1000 W.

Key Specifications and Characteristics

OPERATING SPECIFICATIONS

Coupler Frequency Range: 20 MHz to 1000 MHz

Continuous Wave Power

Rating (nominal): 1000 Watts

Impedance (nominal): 50 Ω

Insertion Voltage Standing-Wave Ratio:

20 MHz to 512 MHz: 1.10:1 (ratio)

512 MHz to 1000 MHz: 1.25:1 (ratio)

Insertion Loss:

20 MHz to 512 MHz: 0.1 dB

512 MHz to 1000 MHz: 0.2 dB

Connectors:

Input/Output: Male Type-N

Input/Output: Female Type-N

Sample: Female Type-BNC

ENVIRONMENTAL CONDITIONS

Ambient Operating

Temperatures: 0°C to 50°C (32°F to 122°F)

Storage/Transport

Temperatures: -40°C to +71°C (-40°F to +159°F)

Altitude (max): 15,000 ft

Relative Humidity

(noncondensing): 0% to 95% RH \pm 5%

WEIGHTS AND DIMENSIONS

RF Test Set:

Weight: 15 lb (6.8 kg)

Length: 13-3/4 in. (349.3 mm)

Width: 6 in. (171.5 mm)

Height: 12-3/4 in. (323.9 mm)

Coupler:

Weight: 10 oz (0.28 kg)

Length: 2-7/8 in. (73 mm)

Width: 1-1/4 in. (31.8 mm)

Height: 2-51/64 in. (71 mm)

Wattmeter:

Weight: 3 lb (1.4 kg)

Length: 3-5/8 in. (92 mm)

Width: 5-1/4 in. (133.4 mm)

Height: 6-7/8 in. (174.6 mm)

Specialized Test Equipment

Decade Resistor

R3-1,110M

NSN: 7Z6625-01-334-0118

Manufacturer:	PPM, Inc.
Contract No.:	N00104-97-D-X211
SCAT:	4638
Expiration Date:	9/22/02
Price:	\$1,020

Product Features

The PPM Model R3-1,110M decade resistor box is a precision selectable resistance standard suitable for use as a laboratory secondary standard.

The Model R3-1,110M contains three decades of selectable resistance: 1 M Ω per step, 10 M Ω per step, and 100 M Ω per step.

Key Specifications and Characteristics

The following frequency characteristics demonstrate the accuracy of the PPM model R3-1,110M

Inductance is less than 0.8 μ H (all decades set to zero). Capacitance is less than or equal to 15 pF per decade (any decade set to 10).

Accuracy: $\pm(0.1\%$ of setting) at Vdc and $23 \pm 1^\circ\text{C}$ referenced to zero resistance setting.

Maximum Voltage:	1 M Ω per step:	715 V
	10 M Ω per step:	1 kV
	100 M Ω per step:	1 kV

Maximum Voltage to Case: 1kVdc/peak ac, high or low terminal to case

Current Per Decade:	1 M Ω per step:	0.715 mA
	10 M Ω per step:	0.1 mA
	100 M Ω per step:	0.01 mA

Zero Resistance: Less than 0.003 Ω per decade

Specialized Test Equipment

Decade Resistor

R6-111.111K/R6-1,111.110K

NSN: 7Z6625-01-442-9401

NSN: 7Z6625-01-445-7016

Manufacturer:	PPM, Inc.
Contract No.:	N00104-97-D-X105/X207
SCAT:	4634, 4636
Expiration Date:	3/31/00 7/17/2000
Price:	\$823 \$701

Product Features

Models R6-111.111K and R6-1,111.110K are six decade variable resistance decade resistor boxes designed for use as laboratory secondary standards. Full scale resistance of each unit is 111.111K and 1,111.110K respectfully. The frequency characteristics of the units are as follows:

Resistance deviation from value at Vdc is <0.5% at 1 kHz and <5% at 10 kHz. Inductance is less than 0.8 μ H (all decades set to zero). Capacitance is less than or equal to 15 pF per decade (any decade set to 10).

Key Specifications and Characteristics

SPECIFICATIONS

Accuracy: $\pm(0.01\%$ of setting + 2 m Ω) at Vdc and $23 \pm 1^\circ\text{C}$, referenced to zero resistance setting

POWER PER STEP

0.1 Ω per step:	0.25 W
1 Ω per step:	0.5 W
10 Ω per step:	0.5 W
100 Ω per step:	0.5 W
1 k Ω per step:	0.5 W
10 k Ω per step:	0.5 W
100 k Ω per step:	0.5 W

CURRENT PER DECADE

0.1 Ω per step:	1.6 Amps
1 Ω per step:	700 mA
10 Ω per step:	230 mA
100 Ω per step:	70 mA
1 k Ω per step:	23 mA
10 k Ω per step:	7 mA
100 k Ω per step:	2.3 mA

MAXIMUM VOLTAGE

1 kVdc/peak ac, high or low terminal to case

ZERO RESISTANCE

Zero Resistance: Less than 0.002 Ω per decade

Specialized Test Equipment

Manufacturer:	PPM, INC.
Contract No.:	N00104-98-D-X112
SCAT:	4122
Expiration Date:	7/7/03
Price:	\$2,765

Bridge Resistance

R1L-D

NSN: 7Z6625-01-456-9125

Product Features

The Model R1L-D Digital High Resolution Ohmmeter is a portable digital ohmmeter designed to measure low values of resistance. It utilizes the four-wire technique to eliminate errors caused by the resistance of the connections. Two leads are used to source and sink a regulated constant current through the resistance under test, and two separate leads are used to measure the voltage drop across this resistance. The R1L-D then calculates the value of the resistor under test and indicates the value on a LCD display. Three and two-wire measurement methods can also be selected.

In order to maintain accuracy, an automatic zero circuit turns off the test current and resets the zero of the instrument prior to each resistance reading. This also serves to null out any thermally-generated voltages in the test leads or in the resistance being tested.

Key Specifications and Characteristics

RESISTANCE RANGES (PLUS AUTO-RANGE)

199.999 milliohms full scale
1.99999 ohms full scale
19.9999 ohms full scale
199.999 ohms full scale
1999.99 ohms full scale

TEST CURRENTS

199.999 milliohms full scale: 50 mA
1.99999 ohms full scale: 50 mA
19.9999 ohms full scale: 50 mA
199.999 ohms full scale: 0.5 mA
1999.99 ohms full scale: 0.5 mA

ACCURACY

+/- (0.05% of reading + one count)

ENVIRONMENT

Operating Temperature: 0 to 50°C
Storage Temperature: -40 to +71°C

Specialized Test Equipment

Telecommunications Test Set

FB-6000-NAVY-P1

FB-6000-NAVY-P2

NSN: 7Z6625-01-462-7491

NSN: 7Z6625-01-462-7492

Manufacturer:	TTC
Contract No.:	N00104-99-D-X006
SCAT:	4590
Expiration Date:	5/13/04
Price:	\$12,062/\$24,129



Product Features

The FIREBERD 6000 Communications Analyzer is a multifunction test instrument capable of performing extensive bit error rate and service layer testing. Its modular design and available options allow testing of circuits and equipment operating at rates from 50 bps to 52 Mbs. The 6000 allows users to test ATM, frame relay, ISDN, low speed data, T1, 2M, T3, and 34M with the same instrument. The unit provides storage of up to 10 test programs at a touch of a button.

Highlights of the units are:

- Fast Packet testing
- ISDN Testing
- T-Carrier testing
- E-Carrier Testing
- DTE/DCE Datacom Testing

Provided in two configurations, the Fireberd 6000 is adaptable to multiple operating environments.

Key Specifications and Characteristics

Model FB6000 P1

Fireberd 6000A Communication Analyzer

Option 6001 DS1 Jitter Generator

Option 6003 DS1 Jitter Measurement

Option 6004 Clock Recovery

Option 6005 IEEE-488 Remote Control

41400 (RS-449/530/Mil) Interface

41440A (T1/FT1) Interface

Model FB6000 P2

Fireberd 6000A Communication Analyzer

Option 6001 DS1 Jitter Generator

Option 6003 DS1 Jitter Measurement

Option 6004 Clock Recovery

Option 6005 IEEE-488 Remote Control

41400 (RS-449/530/Mil) Interface

41440A (T1/FT1) Interface

41945 (T3) Interface

42242 (Diphase) Interface

43440 (DS1/DS3 ATM) Interface

Specialized Test Equipment

Manufacturer: Fluke
Contract No.: N00104-96-D-N026
SCAT: 4933
Expiration Date: 6/26/01
Price: \$31,669

Multifunction Calibrator

5700A/AN-1

NSN: 7Z6625-01-433-0476

Product Features

The 5700A/AN-1 Multifunction Calibrator is designed to cover the widest portion of today's calibration workload—a wide variety of DMMs from all manufacturers. It delivers direct voltage to 1100 V and alternating voltage from 220 μ V to 1100 V at frequencies from 10 Hz to 1.2 MHz. Cardinal point resistances range from 1 Ω to 100 M Ω in x1 and x1.9 decades, including a short circuit. Direct and alternating current are provided to 2.2 A, and frequencies for alternating current range from 10 Hz to 10 kHz. The 5700A is designed to be taken to the workload. In manufacturing applications, test instruments may be calibrated on-site using artifact Cal Stds, minimizing production line downtime due to calibration recall.



Key Specifications and Characteristics

DC VOLTAGE

Range: 0 V to 1100 V
Resolution: 10 nV to 100 μ V
Stability:
24 Hour: (0.3 ppm + 0.3 μ V) to (0.5 ppm + 200 μ V)
Linearity: (1 ppm + 0.2 μ V) to (1 ppm + 200 μ V)
Noise: 5 μ V rms to 500 μ V rms
Maximum Load: 50 mA
Load Regulation: <0.2 ppm \pm 0.2 μ V, full load to no load
Line Regulation: <0.1 ppm, \pm 10% selected nominal line
Overshoot: <5%
Common Mode Rejection: 140 dB, dc to 400 Hz

AC VOLTAGE

Range: 0.22 mV to 1100 V
Resolution: 1 nV to 1 mV
Frequency: 10 Hz to 1 MHz
Display Format: Voltage or dBm
Overshoot: <10%

RESISTANCE

Range: 0 M Ω to 100 M Ω (0-1-1.9 sequence)
Stability: 2 ppm to 50 ppm

DC CURRENT

Range: 0 A to 2.2 A in 5 ranges
Resolution: 0.1 nA to 1 nA
24-h Stability: (5 ppm + 1 nA) to (9 ppm + 7 μ A)
Compliance Limit: 10 V typical
Maximum Load: 20 k Ω to 2 Ω

AC CURRENT

Range: 9 μ A to 2.2 A
Frequency: 10 Hz to 10 kHz
24-h Stability: typically <(100 ppm + 20 nA)
Power Factor: 0.9 to 1
Frequency Uncertainty: \pm 0.01%
Frequency Resolution: 11.999 counts

GENERAL

Warm-up Time: 30 minutes maximum
Standard Interfaces: IEEE-488, RS-232, 5725A, 5205A, 5220A, phase lock in (BNC), phase reference out
On-site calibration using artifact Cal Package

Product Index

Prices listed reflect the 2000 contract price.

Manufacturer	Model	Item	Price	Page No.
Anritsu	56100NV	Scaler Network Analyzer	\$8,917	2
	68369NV	Sweep Signal Generator	\$17,169	7
	MG3641N	Signal Generator	\$6,885	8
	MW9070NV	Mini Optical Time Domain Reflectometer	\$3,689	35
Arbiter Systems	1040C-03-05	Panel Meter Calibrator	\$16,262	22
Bird Electronics	4410A500	Test Set, Radio Frequency	\$1,541	50
Boonton Electronics	1121	Frequency Analyzer	\$4,937	4
Dranetz Technology	4300	Three Phase Power Analyzer	\$7,492	3
Fluke	41B-AV	Power & Harmonics Meter	\$935	17
	27AN	Digital Multimeter	\$482	20
	5700A/AN-1	Multifunction Calibrator	\$31,669	55
	686/AN	LANMeter	\$10,148	40
	77/BN	Handheld Multimeter	\$83	14
	87	Analog/Digital Multimeter	\$215	15
Gigatronics	8501A-362	Power Meter	\$8,480	12
Hewlett Packard	53131A-010-030-H14	Electronic Counter	\$1,149	33
	8722ES-92	Vector Network Analyzer	\$60,906	5
	33120A-E01	Function/Arbitrary Waveform Generator	\$1,124	9
	E4418B-E23	Power Meter	\$2,086	11
	5350B-001	CW Microwave Frequency Counter	\$2,942	32
	5361B-915	Pulse/CW Microwave Frequency Counter	\$5,676	31
	8970B-E29	Noise Figure Meter	\$18,699	13
	34401A-102	Multimeter	\$797	18
	54645A-E01	100 MHz Oscilloscope	\$1,924	29
	54825N	500 MHz Oscilloscope	\$8,129	27
	E4407S-E57	Microwave Spectrum Analyzer	\$13,935	6
Huntron Instruments	5100DS-99-0315	Test Set, Analog Signature	\$8,063	48
	2000B	Test Set, Semiconductor	\$1,137	49
	2000B-HSR410	Test Set, Semiconductor	\$1,737	49
IFR	2947	Radio Test Set	\$7,433	45
Keithley	175-AV/53A/58	Digital Multimeter	\$1,031	21
	2001-M	Digital Multimeter	\$4,039	25
King Nutronics	3666-10K-2	Pressure Calibrator System	\$34,971	47
Photonix Technologies	PX-D603	Fiber Optical Leak Detector	\$874	37
PPM, Inc.	R1L-B	Digital Micro-ohmmeter	\$889	16
	R1L-D	Bridge Resistance	\$2,765	53
	R3-1,110M	Decade Resistor	\$1,020	51
	R6-111.111K	Decade Resistor	\$823	52
	R6-1,111.110K	Decade Resistor	\$701	52
QuadTech, Inc.	7600	LCR Meter	\$6,314	19
Stanford Research Systems	SR760	FFT Spectrum Analyzer	\$4,398	1

Product Index

<i>Manufacturer</i>	<i>Model</i>	<i>Item</i>	<i>Price</i>	<i>Page No.</i>
Tektronix	THS720A	TekScope™ Handheld Digital Oscilloscope	\$1,914	28
TTC	FB-6000-NAVY-P1	Telecommunications Test Set	\$12,062	54
	FB-6000-NAVY-P2	Telecommunications Test Set	\$24,129	54
Wavetek Wandel & Goltermann	OMK-10/N	Optical Loss Test Set	\$1,360	38
	9314/51	Ethernet/Token Ring	\$8776	41
	9314/52	Ethernet/Token Ring/FDDI	\$13,185	41
	9314/53	LAN/WAN/Ethernet/Token Ring	\$13,405	42
	9314/54	LAN/WAN/Ethernet/Token Ring/FDDI	\$17,659	42
	9316/90.11	LAN/WAN – ATM Chassis	\$4,323	43
	9316/90.12	LAN/WAN – ATM DS-1	\$4,135	43
	9316/90.13	LAN/WAN – ATM DS-3	\$4,216	43
	9316/90.14	LAN/WAN – ATM OC-3 Multimode	\$3,906	43
	9316/90.15	LAN/WAN – ATM OC-3 Single Mode	\$6,966	43
	9316/90.16	LAN/WAN – ATM OC-3 155 Mbps UTP	\$3,994	43
	9305/90.73	LAN/WAN – ATM E-1	\$6,155	43
	9316/01	LAN/WAN – Fast Ethernet	\$13,768	43
	9314/02	LAN/WAN – Ethernet/Token Ring	\$7,186	43
	9314/04	LAN/WAN – FDDI	\$9,380	43
	9314/01	LAN/WAN – WAN	\$7,186	43
	9314/93.33	MENTOR SOFTWARE	\$1,866	43
	LT8155A	LAN CableMeter	\$2,550	39
	MTS 5200	Optical Time Domain Reflectometer	\$9,309	36
	98	Synthesized Oscillator	\$3,017	46
Wayne Kerr, Inc.	AMM20002Q	Modulation Meter	\$7,117	23
	WK7330	Bridge Capacitance	\$3,247	24

New Contracts

<i>Manufacturer</i>	<i>Model</i>	<i>Item</i>	<i>Price</i>	<i>Page No.</i>
Consultronics	AT3-NAV	Telecommunications Test Set	\$5,897	B
Tektronix	1502C-04	Cable Test Set	\$8,614	C
Wavetek Wandel & Goltermann	9314/12	LAN/WAN/Ethernet/Fast Ethernet/ ATM OC-3		D

New Contracts

Telecommunications Test Set

AT3-NAV

NSN: 7Z6625-01-466-7151

Manufacturer: Consultronics, Inc.
Contract No.: N00104-99-D-X012
SCAT: 4570
Expiration Date: 8/23/04
Price: \$5,897



Product Features

The Automatic Transmission Impairment Measuring Set (Auto-TIMS III) is able to quickly perform a complete set of automatic analog measurements on 2 or 4 wire data circuits for cable, microwave, and satellite circuits. The unit provides an end-to-end and loopback testing capability with remote transponders. Testing can be conducted locally or from a remote location. Measurements are compared to industry standard pass/fail masks and are displayed in both numerical and graphical formats. The unit also provides Automatic DDS, ISDN and HDSL Local Loop qualification tests including attenuation, frequency response, noise, and high-speed impulse noise.

Key Specifications and Characteristics

Display:	480 x 128 Graphic LCD Display
Input / Output Connectors:	1000 VAC rms. to ground (1 minute)
Maximum DC Input:	200 VDC (Tx or Rx) or peak AC
Loop Holding:	Approximately 24 mA (Tx or Rx)
Impedance (Terminated):	Tx Impedances: low impedance, 135 W, 150 W, 600W, 900W, 1200W • Rx Impedances: 135W, 150 W, 600W, 900W, 1200W, bridging
Return Loss (Tx / Rx):	
Auto-TIMS Tx:	> 30 dB from 200 Hz to 20 kHz @ 600W
Auto-TIMS Rx:	> 40 dB from 200 Hz to 20 kHz @ 600W
Storage of Results:	16 complete sets of automatic test results can be stored
Remote Control:	RS232 serial interface with automatic modem initialization (AT command set)
Modem Types:	V.22, V.22bis, V.32, V.32bis, V.34, V34bis, and user customized type
Printer Interface:	Parallel & Serial
Internal Supply:	Gel Cell rechargeable battery
External Supply:	95 V to 250 V AC, 47 to 63 Hz, 0.6 A

Automatic Testing: Attenuation Distortion / Envelope Delay / Loss Deviation / Frequency Offset / Phase Jitter / Signal to Noise Ratio / Noise / Noise to Ground / Non Linear Distortion (NLD) / Hits (Interruptions, Gain hits, Phase hits, Impulse noise)

Modes: 4 wire forward, reverse, bi-directional and loopback
2 wire leased or switched, forward, reverse and bi-directional.
4 wire (Central Office) / 2 wire leased forward, reverse and bi-directional
Testing 2 wire circuits automatically with TX-1 responders.
Testing 4 wire circuits automatically with TX-4 responders.
DDS, ISDN, HDSL cable qualification.

LEVEL & FREQUENCY MEASUREMENT

Transmitter:	
Frequency Range:	40 Hz to 400 kHz
Frequency Accuracy:	±0.01%
Resolution:	1 Hz
Step Size:	1 Hz, 10 Hz, 100 Hz, 1 kHz, 10 kHz

Frequency Measurement:	
Minimum Signal Level:	-40 dBm
Resolution:	1 Hz from 40 Hz to 400 kHz
Accuracy:	±1 Least Significant Digit
Reference Accuracy:	100 ppm

New Contracts

Cable Test Set

1502C-04

NSN: 7Z6625-01-376-8050

Manufacturer: Tektronix
Contract No.: N00104-99-D-X013
SCAT: 4298
Expiration Date: 8/17/04
Price: \$8,614



Product Features

The Model 1502C Metallic Time Domain Reflectometer is designed to quickly and easily locate opens, shorts, crimps, and other defects in metallic cables. The unit can measure cables up to 50,000 feet in length. The backlit LCD assures sharp images in any lighting. The menu driven operation allows users to quickly test cables and also includes help screens which saves valuable time. A waveform storage

capability allows for comparison of real time and stored results. The unit has both AC and DC operation insuring portability

Key Specifications and Characteristics

ELECTRICAL

Test Signal:
Step rise.

Amplitude:
300 mV nominal into 50 W load.

System Risetime:
10% to 90%, 200 ps (1.15 in./2.92 cm).

Output impedance:
50 W

Electrostatic Discharge Protection:
1 kV/500 pF/1 kW

Maximum Range:
0.05 in. (0.12 cm).

Distance Readout Resolution:
0.05 in. (0.12 cm).

Noise Filtering:
1 to 128 averages.

Vertical Scale:
0.05 mp/div to 500 mp/div.

Vertical Accuracy:
3% full scale.

Distance/Division:
0.1 Ft./div to 200 ft./div (0.025 m/div to 50 m/div).

Horizontal Accuracy:
1.6 inches (0.41 m) or + 1% or measured distance plus uncertainty in V_p ,
whichever is greater (for $V_p = 0.66$ and Dist/Div+ 1 ft.)

New Contracts

LAN/WAN Protocol Analyzers

LAN/WAN/Ethernet/Fast Ethernet/ATM OC-3
9314/12

NSN: 6625-01-470-3150

Product Features

The 9314/12 configuration is a powerful, flexible, and portable Internetworking Protocol Analyzer for monitoring, troubleshooting, and simulation in Ethernet, Fast Ethernet, ATM, and WAN environments. The analyzer is configured in a rugged aluminum case for safe and secure transport in addition to a lightweight soft pack for accessories storage. The analyzer is delivered with Mentor software, the interactive expert analysis system. The mentor system is a powerful, efficient, and easy-to-use diagnostic tool that quickly identifies and helps to solve network problems.

Manufacturer:	Wavetek Wandel & Goltermann
Contract No.:	N00104-99-D-X103
SCAT:	TBD
Expiration Date:	2/10/03
Price:	\$29,780



Key Specifications and Characteristics

ETHERNET/FAST ETHERNET, and WAN

Auto detect Ethernet/Fast Ethernet

Simultaneous multiport real-time analysis across LAN/WAN

Real-time hardware filtering

Decodes and displays all major protocols in ASCII, hexadecimal, or plain English.

WAN: Decodes encapsulated LAN protocols

ATM

Full SVC emulation and statistics

Automatic ILMI ATM address registration

SoS measurements

Dynamic capture filters based on ATM addresses

Multiport synchronized analysis

Call set-up and report wizards

INTERFACE CONNECTORS

Ethernet/Fast Ethernet: RJ-45, MII

ATM: OC-3 MM, SC

WAN: RS232/V.24, V.35, V.11, RS449, RS530, RS422, Bantam

CONTROLLER

IBM compatible with internal and removable hard drives, 3.5 in. floppy drive,

CD ROM, modem, PCMCIA slots, and active matrix display

POWER REQUIREMENTS

100 to 240 Vac with provided external adapter (selectable)

TRAINING AND SOFTWARE UPGRADES

Two training sessions annually, one in East coast and one in West coast.

Software upgrades are included.